
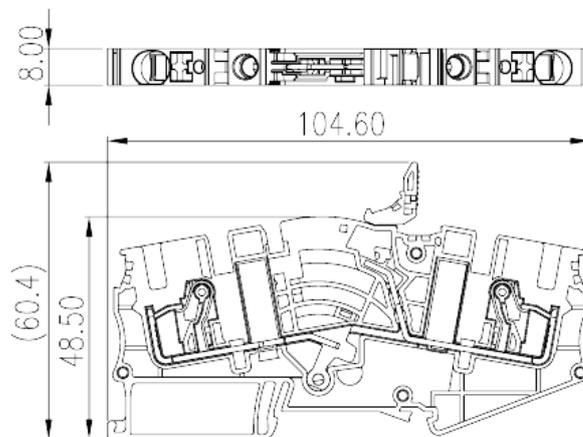


# DPTD6N

DIN

>

:2026-05-14

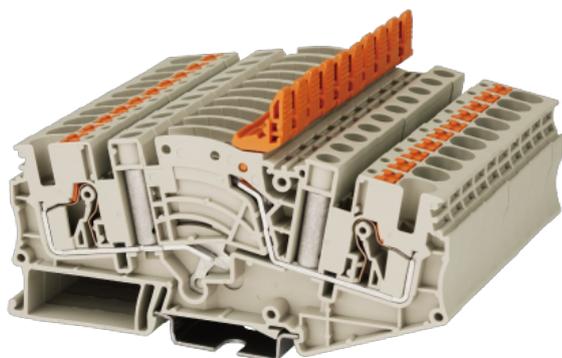

600V, 30A, Beige (default)

	Disconnect Test Terminal Block, Push-in Design
	Disconnect Test Terminal Block
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	104.6
(mm)	8
(mm)	60.4
( )	1P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

**-IEC**

(V)		1000
(A)		30
(III/3)(V)		1000
(III/3)(KV)		8
(mm <sup>2</sup> )		0.5
(mm <sup>2</sup> )		10
(mm <sup>2</sup> )		0.5
(mm <sup>2</sup> )		6
(mm <sup>2</sup> )	,	0.5
(mm <sup>2</sup> )	,	6
(mm <sup>2</sup> )	,	0.5
(mm <sup>2</sup> )	,	6
<sup>2</sup> (mm <sup>2</sup> )	,	0.5
<sup>2</sup> (mm <sup>2</sup> )	,	1.5
Width)(mm)	(Blade thickness x	0.8x4
		12
		TS-35、TS-35/15
		YES
		NO

**-UL**

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		30
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		30
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		5
UL/CUL	AWG	20
UL/CUL	AWG	8
UL/CUL	AWG	20



UL/CUL	AWG	8
<b>&amp;</b>		
	(YES or NO)	YES
가	(YES or NO)	YES
		120
		-40

### UL

	(Group B)(AWG)	20~8
	(Group B)(V)	600
	(Group B)(A)	30
	(Group C)(AWG)	20~8
	(Group C)(V)	600
	(Group C)(A)	30
	(Group D)(AWG)	20~8
	(Group D)(V)	600
	(Group D)(A)	5

### CUL

	(Group B)(AWG)	20~8
	(Group B)(V)	600
	(Group B)(A)	30
	(Group C)(AWG)	20~8
	(Group C)(V)	600
	(Group C)(A)	30
	(Group D)(AWG)	20~8
	(Group D)(V)	600
	(Group D)(A)	5

--	--	--

