
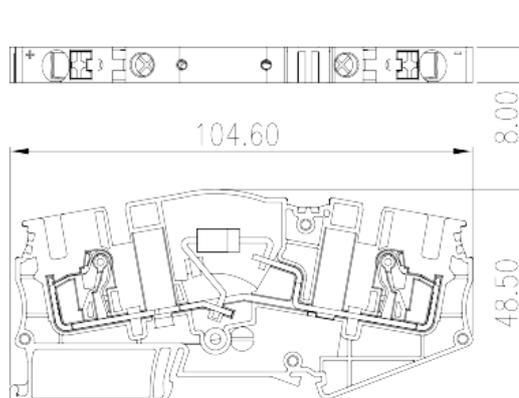


DPTD6N-D05

DIN

>

:2026-05-14

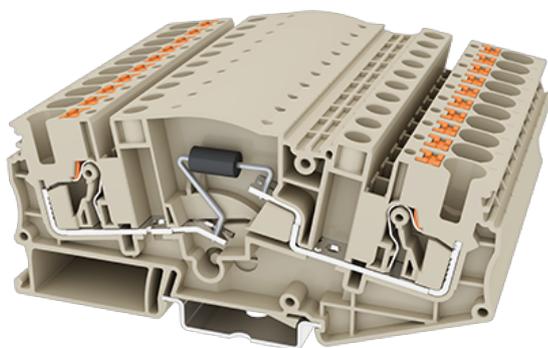

600V, 1.3A, Beige (default)

| | |
|-------|--------------------------------------|
| | Diode Terminal Block, Push-in Design |
| | Diode Terminal Block |
| | Beige (default) |
| | Push-in Design |
| | Rail Mounting |
| (mm) | 104.6 |
| (mm) | 8 |
| (mm) | 48.5 |
| () | 1P |
| | Single level |
| | 2 |
| | PA |
| | I |
| UL 94 | V0 |
| | 500M at DC 500V |

-IEC

| | |
|-------------------------------------|-------|
| (V) | 1000 |
| (A) | 1.3 |
| (III/3)(V) | 1000 |
| (III/3)(KV) | 8 |
| (mm ²) | 0.5 |
| (mm ²) | 10 |
| (mm ²) | 0.5 |
| (mm ²) | 6 |
| (mm ²) , , | 0.5 |
| (mm ²) , , | 6 |
| (mm ²) , , | 0.5 |
| (mm ²) , , | 6 |
| ² (mm ²) , , | 0.5 |
| ² (mm ²) , , | 1.5 |
| Width)(mm) (Blade thickness x | 0.8x4 |
| | 12 |
| | TS-35 |
| | YES |
| | NO |

-UL

| | |
|---------------------|-----|
| (UL/CUL Group B)(V) | 600 |
| (UL/CUL Group B)(A) | 1.3 |
| (UL/CUL Group C)(V) | 600 |
| (UL/CUL Group C)(A) | 1.3 |
| UL/CUL AWG | 20 |
| UL/CUL AWG | 8 |
| UL/CUL AWG | 20 |
| UL/CUL AWG | 8 |

&

| | |
|---------------|-----|
| (YES or NO) | YES |
| 가 (YES or NO) | YES |
| | 120 |
| | -40 |

UL

| | |
|----------------|------|
| (Group B)(AWG) | 20~8 |
| (Group B)(V) | 600 |
| (Group B)(A) | 1.3 |
| (Group C)(AWG) | 20~8 |
| (Group C)(V) | 300 |
| (Group C)(A) | 1.3 |

CUL

| | |
|----------------|------|
| (Group B)(AWG) | 20~8 |
| (Group B)(V) | 300 |
| (Group B)(A) | 1.3 |
| (Group C)(AWG) | 20~8 |
| (Group C)(V) | 300 |
| (Group C)(A) | 1.3 |

