
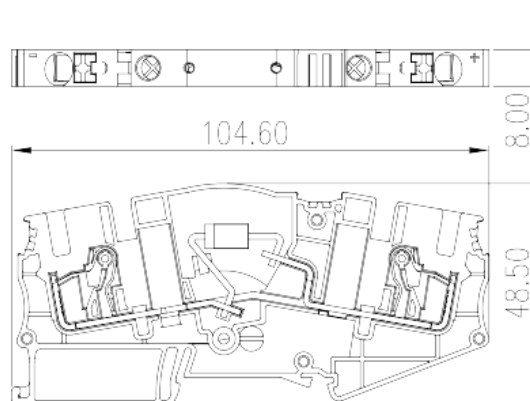


# DPTD6N-D06

DIN

>

:2026-05-14

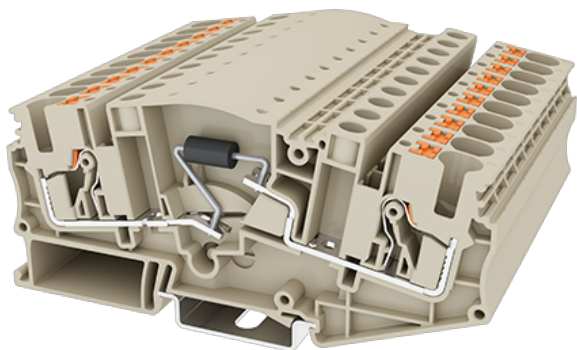

600V, 1.3A, Beige (default)

	Diode Terminal Block, Push-in Design
	Diode Terminal Block
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	104.6
(mm)	8
(mm)	48.5
( )	1P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

**-IEC**

(V)	1000
(A)	1.3
(III/3)(V)	1000
(III/3)(KV)	8
(mm <sup>2</sup> )	0.5
(mm <sup>2</sup> )	10
(mm <sup>2</sup> )	0.5
(mm <sup>2</sup> )	6
(mm <sup>2</sup> ) , ,	0.5
(mm <sup>2</sup> ) , ,	6
(mm <sup>2</sup> ) , ,	0.5
(mm <sup>2</sup> ) , ,	6
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	1.5
Width)(mm) (Blade thickness x	0.8x4
	12
	TS-35
	YES
	NO

**-UL**

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	1.3
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	1.3
UL/CUL AWG	20
UL/CUL AWG	8
UL/CUL AWG	20
UL/CUL AWG	8

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	20~8
(Group B)(V)	600
(Group B)(A)	1.3
(Group C)(AWG)	20~8
(Group C)(V)	600
(Group C)(A)	1.3

CUL

(Group B)(AWG)	20~8
(Group B)(V)	600
(Group B)(A)	1.3
(Group C)(AWG)	20~8
(Group C)(V)	600
(Group C)(A)	1.3

