
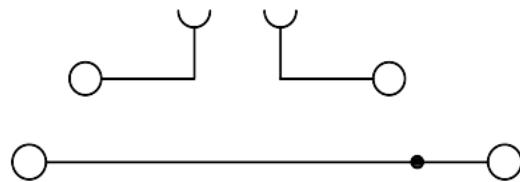


# DKK2.5N-T

DIN

&gt;

:2026-02-09

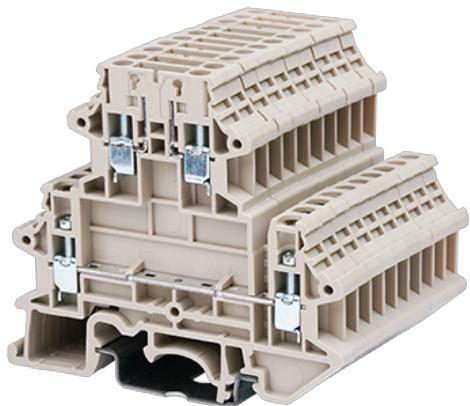

M2.5, 300V, 20A, Beige (default)

DIN rail terminal blocks, Basic Disconnect Terminal Blocks	
Basic Disconnect Terminal Blocks	
Beige (default)	
Screw Connection	
(mm)	5.1
(mm)	71.5
(mm)	62.2
	Double level
	4

UL 94	PA I V0 500M at DC 500V
-------	----------------------------------

-IEC

(V)		400
(A)		23
(III/3)(V)		400
(III/3)(KV)		6
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> )		0.34
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> ) , ,		0.34
(mm <sup>2</sup> ) , ,		2.5
(N.m)		0.4
		9~11

### -UL


(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		20
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		20
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		5
UL/CUL	AWG	22
UL/CUL	AWG	12
UL/CUL	AWG	22
UL/CUL	AWG	12

&

(YES or NO)		YES
가 (YES or NO)		YES
		120
		-40



Delight Through Connections

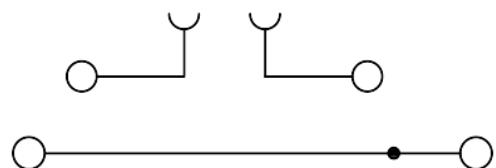

: +886-2-8069-9000 /

: [service@dinkle.com](mailto:service@dinkle.com)

© DINKLE ENTERPRISE CO ,LTD. ALL RIGHT RESERVED