


0162-11XX

PCB > PCB -

:2026-07-05

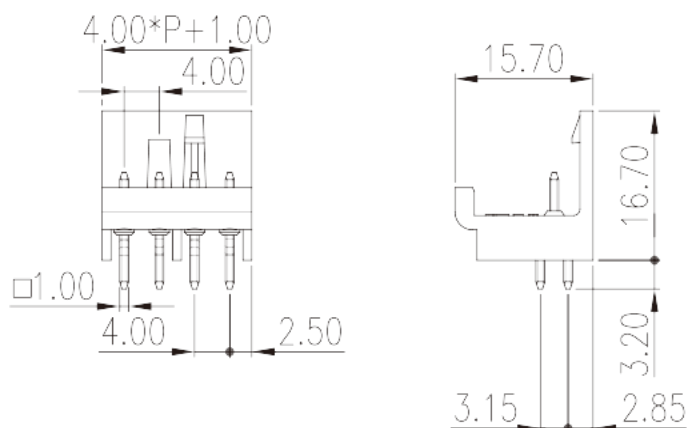

Pitch : 4.00mm, 320V, 17.5A

	PCB Connector – Socket
	PCB Connector – Socket
(mm)	4.00
	Black (default)
	With lock flange
	Wave Soldering
(mm)	4.00*P+1.00
(mm)	15.7
(mm)	16.7
(x) (mm)	1x1
PCB (mm)	1.5
()	02P~24P
	PA
	I
UL 94	V0
	500M at DC 500V



	COPPER ALLOY
	Tin PLATED

-IEC

(V)	320
(A)	17.5
(II/2)(V)	400
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
	M2.5
(N.m)	0.45

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	10
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10

&

가 (YES or NO)	YES
	120
	-40

UL

(Group B)(V)	300
(Group B)(A)	10
(Group D)(V)	300
(Group D)(A)	10

CUL

(Group B)(V)	300
(Group B)(A)	10

(Group D)(V)	300
(Group D)(A)	10

