


5ESN-XXP

PCB > PCB -

:2026-03-30

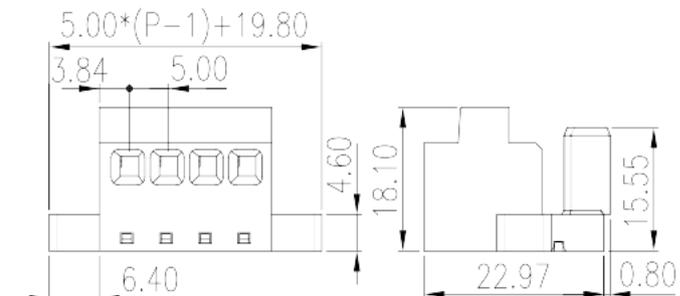

Pitch : 5.00 mm, 300V, 15A

	PCB Connector – Plug, Push-in design
	PCB Connector – Plug
(mm)	5.00
	Black (default)
	Push in Design
	With mounting flange
(mm)	$5 * (P-1) + 19.8$
(mm)	22.97
(mm)	18.1
()	02P~24P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

Tin PLATED

-IEC

(V)	630
(A)	15
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.08
(mm ²)	1.5
(mm ²)	0.08
(mm ²)	1.5
(mm ²) , ,	0.25
(mm ²) , ,	1.5
(mm ²) , ,	0.25
(mm ²) , ,	1.5
² (mm ²) , ,	0.5
² (mm ²) , ,	0.75
	11~12

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	28
UL/CUL AWG	14
UL/CUL AWG	28
UL/CUL AWG	14

&

가 (YES or NO)	YES
	120
	-40

