


EDH130-21XX

PCB > PCB -

:2026-02-10

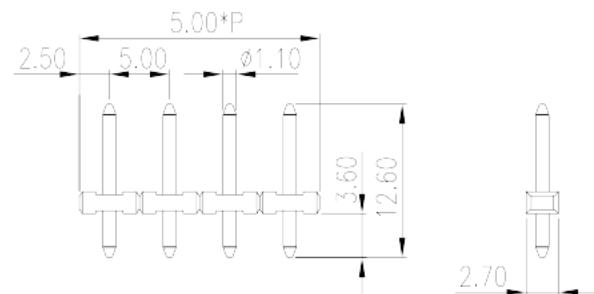

Pitch : 5.00mm, 300V, 12A

	PCB Connector – Socket, Wave soldering
	PCB Connector – Socket
(mm)	5.00
	Black (default)
	Without
	Wave Soldering
(mm)	5.00*P
(mm)	2.7
(mm)	9
(x) (mm)	1.1
PCB (mm)	1.8
()	02~20P

	PBT
	IIIa
UL 94	V0
	1000M at DC 500V

COPPER ALLOY

Tin PLATED

-IEC

(V)	320
(A)	12
(II/2)(V)	320
(III/2)(V)	320
(III/3)(V)	200
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	12
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10

&

	120
	-40

UL

(Group B)(V)	300
(Group B)(A)	12
(Group D)(V)	300
(Group D)(A)	10

CUL

(Group B)(V)	300
(Group B)(A)	12
(Group D)(V)	300
(Group D)(A)	10

