


# EDH130-21XXTH T

PCB > PCB -

:2026-03-30

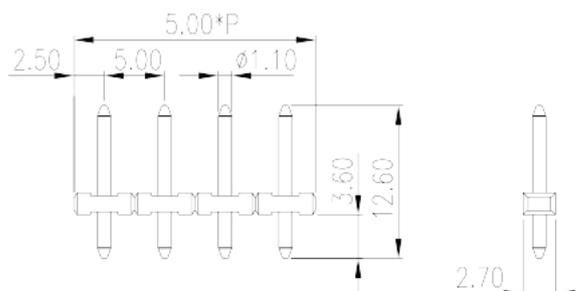

Pitch : 5.00mm, 300V, 12A

	PCB Connector – Socket, Reflow Soldering
	PCB Connector – Socket
(mm)	5.00
	Black (default)
	Without
	Reflow Soldering (Temperature condition according to standard IPC/JEDEC J-STD-020E)
(mm)	5.00*P
(mm)	2.7
(mm)	9
( x ) (mm)	1.1
PCB (mm)	1.8
( )	02~20P

HIGH-TEMPERATURE PLASTICS



	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED
MSL	4

**-IEC**

(V)	320
(A)	12
(II/2)(V)	320
(III/2)(V)	320
(III/3)(V)	200
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	12
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10

**&**

	120
	-40

**UL**

(Group B)(V)	300
(Group B)(A)	12
(Group D)(V)	300
(Group D)(A)	10

**CUL**

(Group B)(V)	300
--------------	-----

(Group B)(A)	12
(Group D)(V)	300
(Group D)(A)	10

