


2EHDRM-XXPWR

PCB > :2025-11-05 :V1



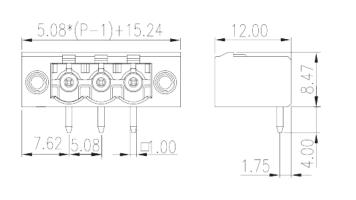

Pitch: 5.08 mm, 300V, 20A

	PCB Connector - Socket, Wave soldering
	PCB Connector - Socket
(mm)	5.08
	Black (default)
	With threaded flange
	Wave Soldering
(mm)	5.08*(P-1)+15.24
(mm)	12
(mm)	8.47
(x) (mm)	1.0x1.0
CB (mm)	1.6~1.7
()	02P~24P
	Single level

	PA
	I
UL 94	V0

	500M at DC 500V	
	COPPER ALLOY	
	Tin PLATED	
-IEC		
(V)	630	
(A)	18	
(II/2)(V)	630	
(III/2)(V)	320	
(III/3)(V)	320	
(II/2)(KV)	4	
(III/2)(KV)	4	
(III/3)(KV)	4	
(N.m)	0.3	
-UL		
(UL/CUL Group B)(V)	300	
(UL/CUL Group B)(A)	20	
(UL/CUL Group D)(V)	300	
(UL/CUL Group D)(A)	10	
JL		
(Group B)(V)	300	
(Group B)(A)	20	
(Group D)(V)	300	
(Group D)(A)	10	
CUL		
(Group B)(V)	300	
(Group B)(A)	20	
(Group D)(V)	300	
(Group D)(A)	10	

