


# 5EHDRRM- XXPLWR

PCB &gt;

:2026-02-09 :V1

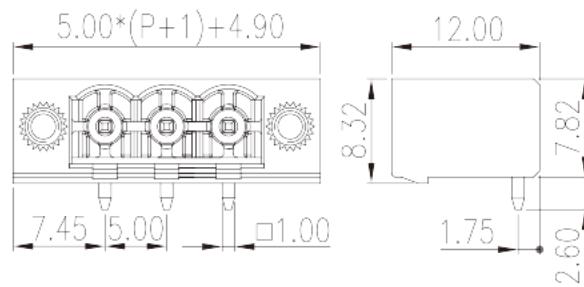

Pitch : 5.00 mm, 300V, 15A

|                  |   |
|------------------|---|
|                  | PCB Connector – Socket, Reflow Soldering  |
|                  | PCB Connector – Socket  |
| (mm)             | 5   |
|                  | Black (default)   |
|                  | With threaded flange  |
|                  | Reflow Soldering (Temperature condition according to standard IPC/JEDEC J-STD-020E) |
| (mm)             | 5.00*(P-1)+14.9   |
| (mm)             | 12  |
| (mm)             | 8.32  |
| (    x    ) (mm) | 1.0x1.0   |
| PCB (mm)         | 1.6~1.7   |
| (    )           | 02P~24P   |
|                  | Single level  |

|       |                           |
|-------|---------------------------|
|       | HIGH-TEMPERATURE PLASTICS |
| UL 94 | V0                        |
|       | 500M at DC 500V           |
|       | COPPER ALLOY              |
|       | Tin PLATED                |
| MSL   | 1                         |

**-IEC**

|             |     |
|-------------|-----|
| (V)         | 600 |
| (A)         | 18  |
| (II/2)(V)   | 600 |
| (III/2)(V)  | 400 |
| (III/3)(V)  | 320 |
| (II/2)(KV)  | 4   |
| (III/2)(KV) | 4   |
| (III/3)(KV) | 4   |
| (N.m)       | 0.2 |

**-UL**

|                     |     |
|---------------------|-----|
| (UL/CUL Group B)(V) | 300 |
| (UL/CUL Group B)(A) | 15  |
| (UL/CUL Group D)(V) | 300 |
| (UL/CUL Group D)(A) | 15  |

**&**

|   |             |     |
|---|-------------|-----|
| 가 | (YES or NO) | YES |
|   |             | 120 |
|   |             | -40 |

**UL**

|              |     |
|--------------|-----|
| (Group B)(V) | 300 |
| (Group B)(A) | 15  |
| (Group D)(V) | 300 |
| (Group D)(A) | 10  |

## CUL

|              |     |
|--------------|-----|
| (Group B)(V) | 300 |
| (Group B)(A) | 15  |
| (Group D)(V) | 300 |
| (Group D)(A) | 10  |

