
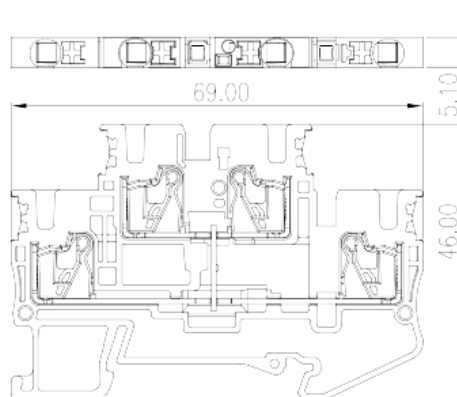


# DPP2.5N-PV

DIN

>

:2026-07-04

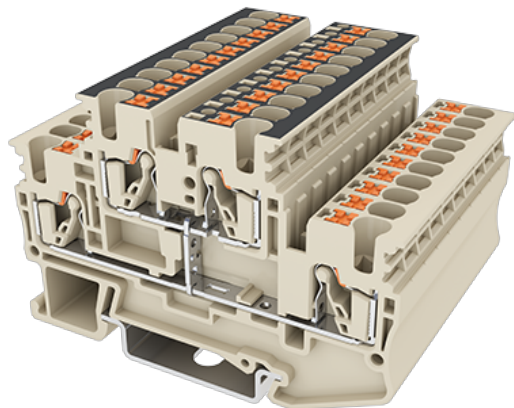

300V, 20A, Beige (default)

	Bi-level Feed-Through Terminal Block, Push-in Design
	Bi level Feed Through Terminal Blocks
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	69.2
(mm)	5.1
(mm)	46
( )	1P
	Double level
	4
	PA
	I
UL 94	V0
	500M at DC 500V

**-IEC**

(V)	500
(A)	22
(III/3)(V)	500
(III/3)(KV)	6
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	4
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.5
Width)(mm) (Blade thickness x	0.6x3.5
	10
	TS-35, TS-35/15
	YES
	NO

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	20
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	20
UL/CUL AWG	26
UL/CUL AWG	12
UL/CUL AWG	26
UL/CUL AWG	12

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	26~12
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	26~12
(Group C)(V)	300
(Group C)(A)	20

CUL

(Group B)(AWG)	26~12
(Group B)(V)	300
(Group B)(A)	20
(Group C)(AWG)	26~12
(Group C)(V)	300
(Group C)(A)	20

