



DPP4N-PV

DIN > :2025-11-05

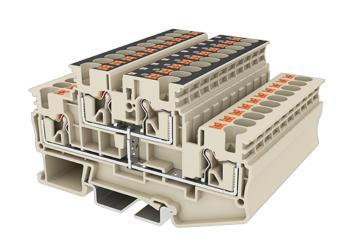



300V, 30A, Beige (default)

	Bi-level Feed-Through Terminal Block, Push-ir Design
	Bi level Feed Through Terminal Blocks
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	81
(mm)	6.1
(mm)	46
()	1P
	Double level
	4

	PA
	I
UL 94	VO
	500M at DC 500V

-IEC

(V)	500
(A)	28
(III/3)(V)	500
(III/3)(KV)	6
(mm ²)	0.2
(mm²)	6
(mm ²)	0.2
(mm²)	4
(mm ²)	0.25
(mm ²)	4
(mm ²)	0.25
(mm ²)	4
2 , , , , (mm ²)	0.5
2 (mm ²)	1
(Blade thickness x Width)(mm)	0.8x4
	12
	TS-35、TS-35/15
	YES
	NO
-UL	
(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	30
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	30
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	5
UL/CUL AWG	24
UL/CUL AWG	10
UL/CUL AWG	24



UL/CUL AWG 10

&

	(YES or NO)	YES
가	(YES or NO)	YES
		120
		-40

