


DKU60

NEMA

>

:2026-05-17

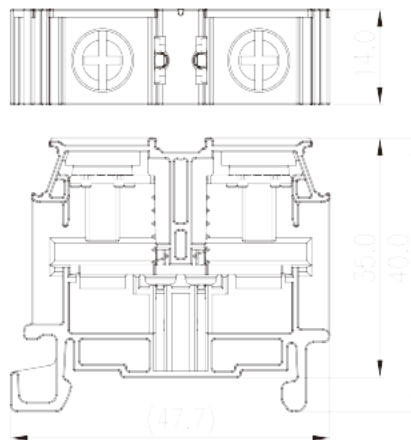

M5, 600V, 60/90A

| | |
|-------|---|
| | Feed-Through single level, Screw Connection |
| | Feed-Through single level |
| (mm) | 14 |
| | Refer to drawing |
| | Screw Connection |
| | Rail mounting |
| (mm) | 47.7 |
| (mm) | 14 |
| (mm) | 33.5 (TS-35N) /41 (TS-35/15N) |
| | 01P |
| () | 01P |
| | 1 |
| | 2 |
| | PC |
| | a |
| UL 94 | V2 |



| | |
|--|------------------|
| | 1000M at DC 500V |
| | COPPER ALLOY |
| | Tin PLATED |

-IEC

| | |
|--------------------|--|
| (V) | 800 |
| (A) | 76 |
| (III/3)(V) | 800 |
| (III/3)(KV) | 8 |
| (mm ²) | 0.5 |
| (mm ²) | 16 |
| (mm ²) | 0.5 |
| (mm ²) | 16 |
| | M5 |
| Philips | PH2 |
| (N.m) | 2.6~3.7 |
| (N.m) | 2.6 |
| (N.m) | 3.7 |
| | The stripping length depends on the specification provided by the cablelug manufacturer. |
| | TS-35N、TS-35/15N |
| | YES |
| | NO |

-UL

| | |
|---------------------|-----|
| (UL/CUL Group B)(V) | 600 |
| (UL/CUL Group B)(A) | 60 |
| (UL/CUL Group C)(V) | 600 |
| (UL/CUL Group C)(A) | 60 |
| (UL/CUL Group D)(V) | 600 |
| (UL/CUL Group D)(A) | 60 |
| UL/CUL AWG | 20 |
| UL/CUL AWG | 6 |
| UL/CUL AWG | 20 |
| UL/CUL AWG | 6 |



&

| | |
|---------------|-----|
| (YES or NO) | YES |
| 가 (YES or NO) | NO |
| | 125 |
| | -40 |

UL

| | |
|----------------|-----------------|
| (Group B)(AWG) | 20-6/(2)20-(2)8 |
| (Group B)(V) | 600 |
| (Group B)(A) | 60/90 |
| (Group C)(AWG) | 20-6/(2)20-(2)8 |
| (Group C)(V) | 600 |
| (Group C)(A) | 60/90 |
| (Group D)(AWG) | 20-6/(2)20-(2)8 |
| (Group D)(V) | 600 |
| (Group D)(A) | 5 |

CUL

| | |
|----------------|-----------------|
| (Group B)(AWG) | 20-6/(2)20-(2)8 |
| (Group B)(V) | 600 |
| (Group B)(A) | 60/90 |
| (Group C)(AWG) | 20-6/(2)20-(2)8 |
| (Group C)(V) | 600 |
| (Group C)(A) | 60/90 |
| (Group D)(AWG) | 20-6/(2)20-(2)8 |
| (Group D)(V) | 600 |
| (Group D)(A) | 5 |

VDE

| | |
|--------------------|--------|
| (mm ²) | 0.5~16 |
| (V) | 800 |
| (A) | 76 |

