


DKB20N-XXPCK

NEMA

>

:2025-05-23

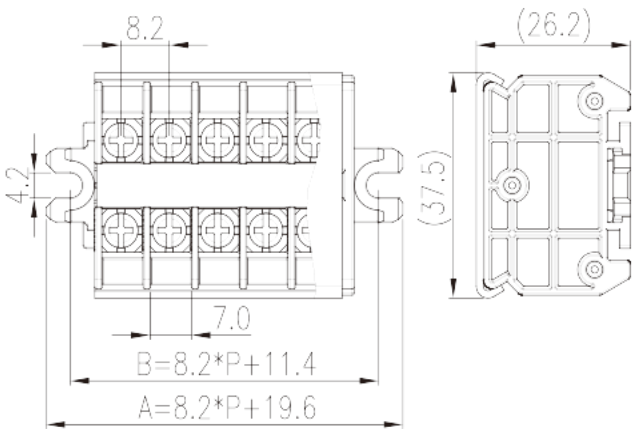

Pitch : 8.20mm, M3.5, 600V, 20A

	Panel Mounting, Screw Connection
	Panel Mounting
(mm)	8.2
	Refer to drawing
	Screw Connection
(mm)	8.20*P+19.6
(mm)	36.5
(mm)	Refer to drawing
	01P~20P
()	01P~20P
	1
	2~40
	PC
	a
UL 94	V2
	≥ 1000MΩ at DC 500V

	COPPER ALLOY
	Tin PLATED

-IEC

(V)	630
(A)	24
(III/3)(V)	630
(III/3)(KV)	8
(mm ²)	0.2
(mm ²)	2.5
(mm ²)	0.2
(mm ²)	2.5
2 (mm ²)	2.5
2 (mm ²)	2.5
	M3.5
Philips	PH2
(N.m)	0.8~1
(N.m)	0.8
(N.m)	1
(N.m)	0.8
	9~10The stripping length depends on the specification provided by the cablelug manufacturer
	TS-35N、TS-35/15N
	YES
	NO

-UL

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	20
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	20
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	20
UL/CUL AWG	26
UL/CUL AWG	12



UL/CUL	AWG	26
UL/CUL	AWG	12

&

(YES or NO)	YES
가 (YES or NO)	NO
	125
	-40

UL

(Group B)(AWG)	26-12
(Group B)(V)	600
(Group B)(A)	20
(Group C)(AWG)	26-12
(Group C)(V)	600
(Group C)(A)	20
(Group D)(AWG)	26-12
(Group D)(V)	600
(Group D)(A)	20

CUL

(Group B)(AWG)	26-12
(Group B)(V)	600
(Group B)(A)	20
(Group C)(AWG)	26-12
(Group C)(V)	600
(Group C)(A)	20
(Group D)(AWG)	26-12
(Group D)(V)	600
(Group D)(A)	20

--	--

