
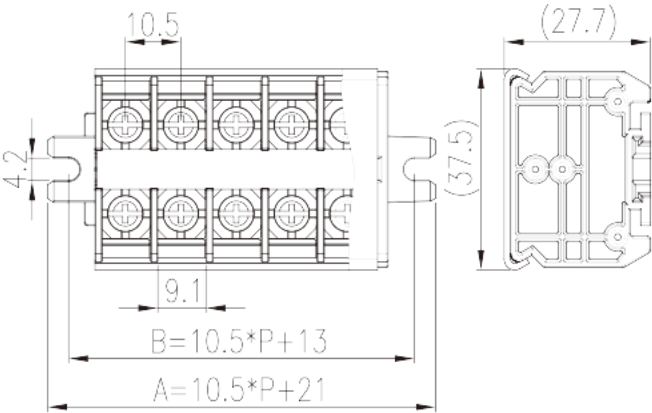


DKB30N-XXPCK

NEMA

>

:2025-05-21

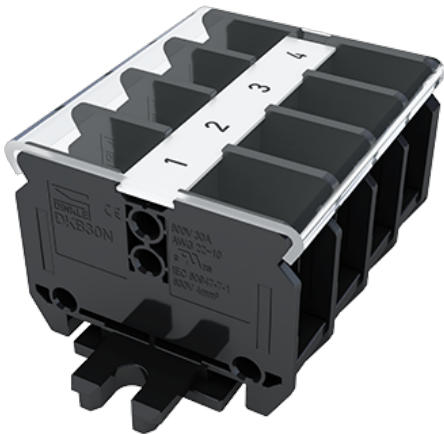

Pitch : 10.50mm, M4, 600V, 30A

	Panel Mounting, Screw Connection
	Panel Mounting
(mm)	10.5
	Refer to drawing
	Screw Connection
(mm)	10.50*P+21
(mm)	36.5
(mm)	Refer to drawing
	01P~16P
()	01P~16P
	1
	2~32
	PC
	a
UL 94	V2
	≥ 1000MΩ at DC 500V



	COPPER ALLOY
	Tin PLATED
-IEC	
(V)	630
(A)	32
(III/3)(V)	630
(III/3)(KV)	8
(mm ²)	0.34
(mm ²)	4
(mm ²)	0.34
(mm ²)	4
2 (mm ²)	4
2 (mm ²)	4
	M4
Philips	PH2
(N.m)	1.2~1.5
(N.m)	1.2
(N.m)	1.5
(N.m)	0.8
	12~13The stripping length depends on the specification provided by the cablelug manufacturer
	TS-35N、TS-35/15N
	YES
	NO

-UL	
(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	30
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	30
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	30
UL/CUL AWG	22
UL/CUL AWG	10



UL/CUL	AWG	22
UL/CUL	AWG	10

&

(YES or NO)	YES
가 (YES or NO)	NO
	125
	-40

UL

(Group B)(AWG)	22-10
(Group B)(V)	600
(Group B)(A)	30
(Group C)(AWG)	22-10
(Group C)(V)	600
(Group C)(A)	30
(Group D)(AWG)	22-10
(Group D)(V)	600
(Group D)(A)	30

CUL

(Group B)(AWG)	22-10
(Group B)(V)	600
(Group B)(A)	30
(Group C)(AWG)	22-10
(Group C)(V)	600
(Group C)(A)	30
(Group D)(AWG)	22-10
(Group D)(V)	600
(Group D)(A)	30

--	--

