


# DKB40N-XXPCK

NEMA

>

:2025-05-01

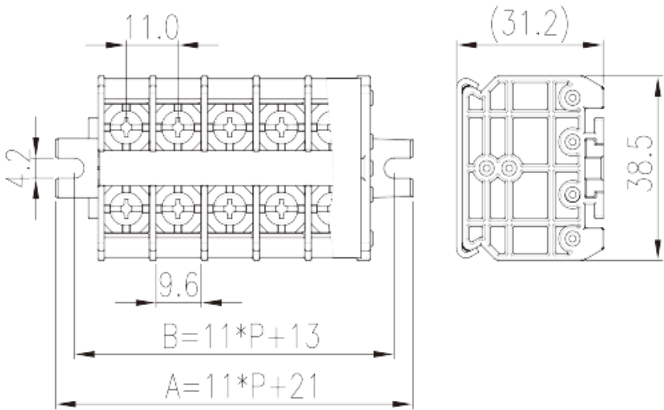

Pitch : 11mm, M4, 600V, 40A

|       |                                  |
|-------|----------------------------------|
|       | Panel Mounting, Screw Connection |
|       | Panel Mounting                   |
| (mm)  | 11                               |
|       | Refer to drawing                 |
|       | Screw Connection                 |
| (mm)  | $11.00*P+21$                     |
| (mm)  | 38.5                             |
| (mm)  | Refer to drawing                 |
|       | 01P~16P                          |
| ( )   | 01P~16P                          |
|       | 1                                |
|       | 2~32                             |
|       | PC                               |
|       | a                                |
| UL 94 | V2                               |
|       | $\geq 1000M\Omega$ at DC 500V    |



|                      |                                                                                              |
|----------------------|----------------------------------------------------------------------------------------------|
|                      | COPPER ALLOY                                                                                 |
|                      | Tin PLATED                                                                                   |
| <b>-IEC</b>          |                                                                                              |
| (V)                  | 630                                                                                          |
| (A)                  | 41                                                                                           |
| (III/3)(V)           | 630                                                                                          |
| (III/3)(KV)          | 8                                                                                            |
| (mm <sup>2</sup> )   | 0.34                                                                                         |
| (mm <sup>2</sup> )   | 6                                                                                            |
| (mm <sup>2</sup> )   | 0.34                                                                                         |
| (mm <sup>2</sup> )   | 6                                                                                            |
| 2 (mm <sup>2</sup> ) | 6                                                                                            |
| 2 (mm <sup>2</sup> ) | 6                                                                                            |
|                      | M4                                                                                           |
| Philips              | PH2                                                                                          |
| (N.m)                | 1.2~1.5                                                                                      |
| (N.m)                | 1.2                                                                                          |
| (N.m)                | 1.5                                                                                          |
| (N.m)                | 0.8                                                                                          |
|                      | 13~14The stripping length depends on the specification provided by the cablelug manufacturer |
|                      | TS-35N、TS-35/15N                                                                             |
|                      | YES                                                                                          |
|                      | NO                                                                                           |

|                     |     |
|---------------------|-----|
| <b>-UL</b>          |     |
| (UL/CUL Group B)(V) | 600 |
| (UL/CUL Group B)(A) | 40  |
| (UL/CUL Group C)(V) | 600 |
| (UL/CUL Group C)(A) | 40  |
| (UL/CUL Group D)(V) | 600 |
| (UL/CUL Group D)(A) | 40  |
| UL/CUL AWG          | 22  |
| UL/CUL AWG          | 8   |



|        |     |    |
|--------|-----|----|
| UL/CUL | AWG | 22 |
| UL/CUL | AWG | 8  |

&amp;

|               |     |
|---------------|-----|
| (YES or NO)   | YES |
| 가 (YES or NO) | NO  |
|               | 125 |
|               | -40 |

## UL

|                |      |
|----------------|------|
| (Group B)(AWG) | 22-8 |
| (Group B)(V)   | 600  |
| (Group B)(A)   | 40   |
| (Group C)(AWG) | 22-8 |
| (Group C)(V)   | 600  |
| (Group C)(A)   | 40   |
| (Group D)(AWG) | 22-8 |
| (Group D)(V)   | 600  |
| (Group D)(A)   | 40   |

## CUL

|                |      |
|----------------|------|
| (Group B)(AWG) | 22-8 |
| (Group B)(V)   | 600  |
| (Group B)(A)   | 40   |
| (Group C)(AWG) | 22-8 |
| (Group C)(V)   | 600  |
| (Group C)(A)   | 40   |
| (Group D)(AWG) | 22-8 |
| (Group D)(V)   | 600  |
| (Group D)(A)   | 40   |

|  |  |
|--|--|
|  |  |
|--|--|

