
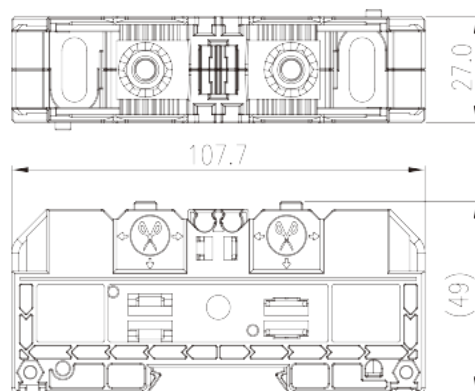


DKM35

DIN

>

:2026-07-05

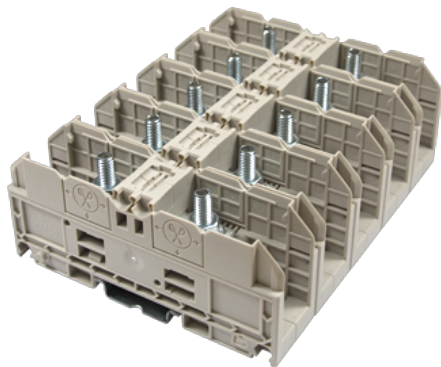

M6, 1500V, 170A, Beige (default)

	Feed-through Single Level, Stud Connection
	Feed-through Single Level
(mm)	27
	Refer to drawing
	Stud Connection
(mm)	107.7
(mm)	27
(mm)	49
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC



(V)	1500
(A)	125
(III/3)(V)	1500
(III/3)(KV)	8
(mm ²)	2.5
(mm ²)	35
(mm ²)	2.5
(mm ²)	35
	M6
Philips	10X6.3
(N.m)	3~6
(N.m)	3
(N.m)	6
	The stripping length depends on the specification provided by the cablelug manufacturer
	TS-35
	NO
	NO

-UL

(UL/CUL Group E)(V)	1500
(UL/CUL Group E)(A)	*Single Cable 130A / Double Cable 170A
UL/CUL AWG	14
UL/CUL AWG	1
UL/CUL AWG	14
UL/CUL AWG	1

&

(YES or NO)	NO
가 (YES or NO)	NO
	120
	-40

UL

(Group E)(AWG)	14~1
----------------	------

(Group E)(V)	1500
(Group E)(A)	*Single Cable 130A / Double Cable 170A

CUL

(Group E)(AWG)	14~1
(Group E)(V)	1500
(Group E)(A)	*Single Cable 130A / Double Cable 170A

