


DKM35

DIN

>

:2026-03-30

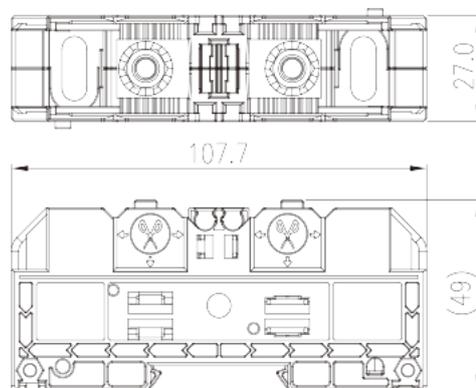

M6, 1500V, 170A, Beige (default)

| | |
|-------|--|
| | Feed-through Single Level, Stud Connection |
| | Feed-through Single Level |
| (mm) | 27 |
| | Refer to drawing |
| | Stud Connection |
| (mm) | 107.7 |
| (mm) | 27 |
| (mm) | 49 |
| | Single level |
| | 2 |
| | PA |
| | I |
| UL 94 | V0 |
| | 500M at DC 500V |

-IEC



| | |
|--------------------|---|
| (V) | 1500 |
| (A) | 125 |
| (III/3)(V) | 1500 |
| (III/3)(KV) | 8 |
| (mm ²) | 2.5 |
| (mm ²) | 35 |
| (mm ²) | 2.5 |
| (mm ²) | 35 |
| | M6 |
| Philips | 10X6.3 |
| (N.m) | 3~6 |
| (N.m) | 3 |
| (N.m) | 6 |
| | The stripping length depends on the specification provided by the cablelug manufacturer |
| | TS-35 |
| | NO |
| | NO |

-UL

| | |
|---------------------|--|
| (UL/CUL Group E)(V) | 1500 |
| (UL/CUL Group E)(A) | *Single Cable 130A / Double Cable 170A |
| UL/CUL AWG | 14 |
| UL/CUL AWG | 1 |
| UL/CUL AWG | 14 |
| UL/CUL AWG | 1 |

&

| | |
|---------------|-----|
| (YES or NO) | NO |
| 가 (YES or NO) | NO |
| | 120 |
| | -40 |

UL

| | |
|----------------|------|
| (Group E)(AWG) | 14~1 |
|----------------|------|

| | |
|--------------|--|
| (Group E)(V) | 1500 |
| (Group E)(A) | *Single Cable 130A / Double Cable 170A |

CUL

| | |
|----------------|--|
| (Group E)(AWG) | 14~1 |
| (Group E)(V) | 1500 |
| (Group E)(A) | *Single Cable 130A / Double Cable 170A |

