


DKM95

DIN

>

:2026-02-09

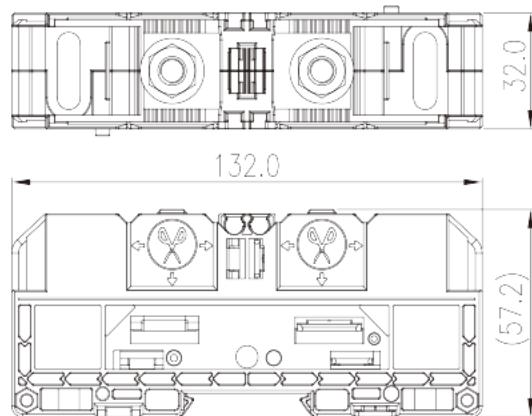

M8, 1500V, 260A, Beige (default)

	Feed-through Single Level, Stud Connection
	Feed-through Single Level
(mm)	32
	Refer to drawing
	Stud Connection
	Panel Mounting/Rail Mounting
(mm)	132
(mm)	32
(mm)	57.2
	Single level
	2

UL 94	PA I VO 500M at DC 500V
-------	----------------------------------



Delight Through Connections

-IEC

(V)	1500
(A)	232
(III/3)(V)	1500
(III/3)(KV)	8
(mm ²)	2.5
(mm ²)	95
(mm ²)	2.5
(mm ²)	95
	M8
(N.m)	6~12
(N.m)	6
(N.m)	12
	The stripping length depends on the specification provided by the cablelug manufacturer
	TS-35
	NO
	NO

-UL

(UL/CUL Group E)(V)	1500
(UL/CUL Group E)(A)	*Single Cable 230A / Double Cable 260A
UL/CUL AWG	14
UL/CUL AWG	4/0
UL/CUL AWG	14
UL/CUL AWG	4/0

&

(YES or NO)	NO
가 (YES or NO)	NO
	120
	-40

UL

(Group E)(AWG)	14~4/0
----------------	--------

(Group E)(V)	1500
(Group E)(A)	*Single Cable 230A / Double Cable 260A

CUL

(Group E)(AWG)	14~4/0
(Group E)(V)	1500
(Group E)(A)	*Single Cable 230A / Double Cable 260A

