
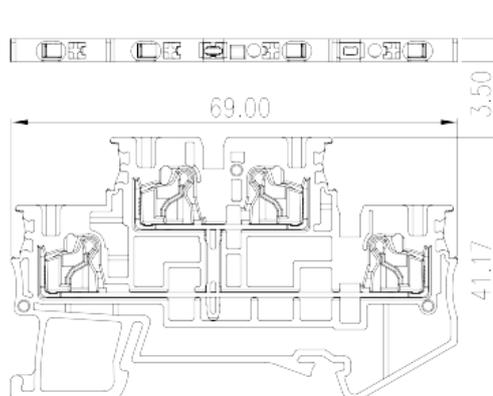


DPP1.5N-PV

DIN

>

:2026-05-14

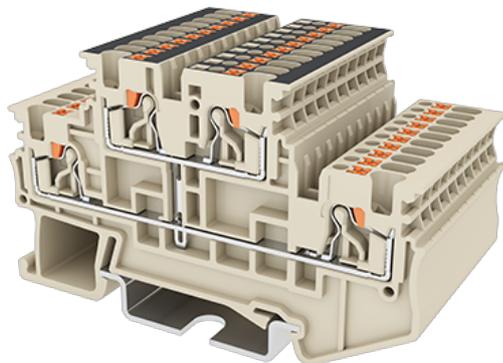

300V, 15A, Beige (default)

| | |
|-------|--|
| | Bi-level Feed-Through Terminal Block, Push-in Design |
| | Bi-level Feed-Through Terminal Blocks |
| | Beige (default) |
| | Push-in Design |
| | Rail Mounting |
| (mm) | 69 |
| (mm) | 3.5 |
| (mm) | 41.2 |
| () | 1P |
| | Double level |
| | 4 |
| | PA |
| | I |
| UL 94 | V0 |
| | 500M at DC 500V |

-IEC

| | |
|-------------------------------|-----------------|
| (V) | 500 |
| (A) | 17.5 |
| (III/3)(V) | 500 |
| (III/3)(KV) | 6 |
| (mm ²) | 0.2 |
| (mm ²) | 1.5 |
| (mm ²) | 0.2 |
| (mm ²) | 1.5 |
| (mm ²) , , | 0.25 |
| (mm ²) , , | 1.5 |
| (mm ²) , , | 0.25 |
| (mm ²) , , | 0.75 |
| Width)(mm) (Blade thickness x | 0.4x2.5 |
| | 8~9 |
| | TS-35, TS-35/15 |
| | YES |
| | NO |

-UL

| | |
|---------------------|-----|
| (UL/CUL Group B)(V) | 300 |
| (UL/CUL Group B)(A) | 15 |
| (UL/CUL Group C)(V) | 300 |
| (UL/CUL Group C)(A) | 15 |
| UL/CUL AWG | 26 |
| UL/CUL AWG | 14 |
| UL/CUL AWG | 26 |
| UL/CUL AWG | 14 |

&

| | |
|---------------|-----|
| (YES or NO) | YES |
| 가 (YES or NO) | YES |



| | |
|--|-----|
| | 120 |
| | -40 |

UL

| | |
|----------------|-------|
| (Group B)(AWG) | 26~14 |
| (Group B)(V) | 300 |
| (Group B)(A) | 15 |
| (Group C)(AWG) | 26~14 |
| (Group C)(V) | 300 |
| (Group C)(A) | 15 |

CUL

| | |
|----------------|-------|
| (Group B)(AWG) | 26~14 |
| (Group B)(V) | 300 |
| (Group B)(A) | 15 |
| (Group C)(AWG) | 26~14 |
| (Group C)(V) | 300 |
| (Group C)(A) | 15 |

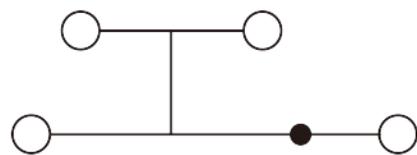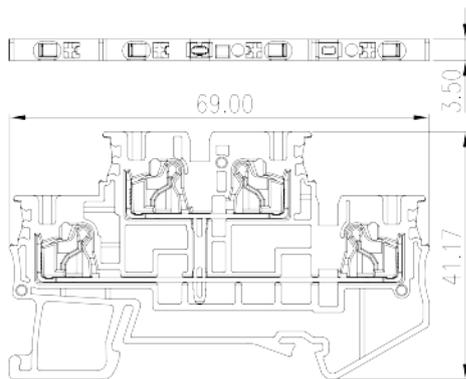



Delight Through Connections