
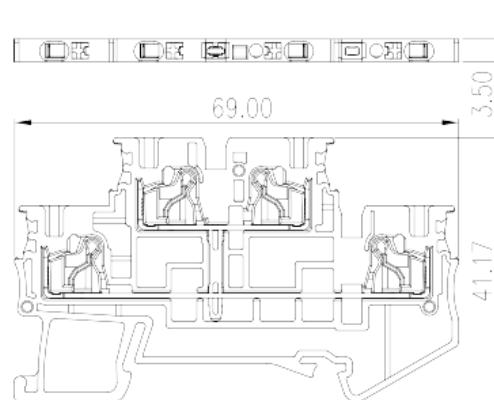


DPP1.5N-PV

DIN

>

:2026-02-09

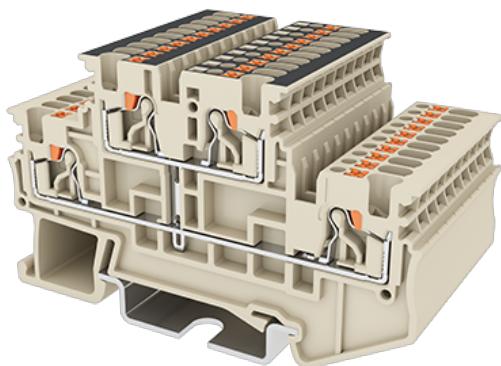

300V, 15A, Beige (default)

	Bi-level Feed-Through Terminal Block, Push-in Design
	Bi-level Feed-Through Terminal Blocks
(mm)	Beige (default)
(mm)	Push-in Design
(mm)	Rail Mounting
()	69
(mm)	3.5
(mm)	41.2
()	1P
	Double level
	4

UL 94	PA I V0 500M at DC 500V
-------	----------------------------------



Delight Through Connections

-IEC

(V)		500
(A)		17.5
(III/3)(V)		500
(III/3)(KV)		6
(mm ²)		0.2
(mm ²)		1.5
(mm ²)		0.2
(mm ²)		1.5
(mm ²) , , ,		0.25
(mm ²) , , ,		1.5
(mm ²) , , ,		0.25
(mm ²) , , ,		0.75
Width)(mm)	(Blade thickness x	0.4x2.5
		8~9
		TS-35, TS-35/15
		YES
		NO

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		15
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		15
UL/CUL	AWG	26
UL/CUL	AWG	14
UL/CUL	AWG	26
UL/CUL	AWG	14

&

(YES or NO)		YES
가 (YES or NO)		YES

120

-40

