
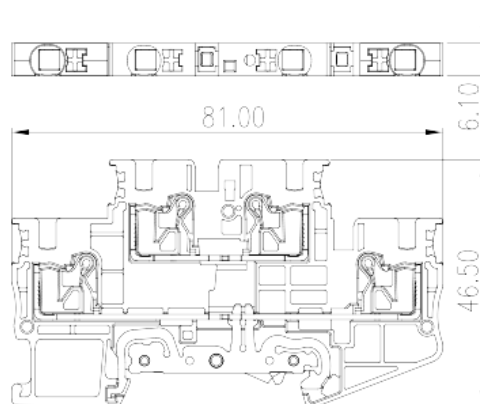


DPP4N-L2PE

DIN

>

:2026-07-05

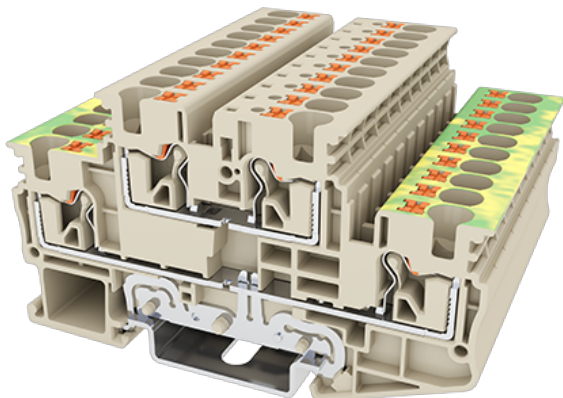

300V, 30A, Beige (default)

	Grounding Terminal Block, Push-in Design
	Grounding Terminal Blocks
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	81
(mm)	6.1
(mm)	46.5
()	1P
	Double level
	4
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)	500
(A)	28
(III/3)(V)	500
(III/3)(KV)	6
(mm ²)	0.2
(mm ²)	6
(mm ²)	0.2
(mm ²)	4
(mm ²) , ,	0.25
(mm ²) , ,	4
(mm ²) , ,	0.25
(mm ²) , ,	4
² (mm ²) , ,	0.5
² (mm ²) , ,	1
Width)(mm) (Blade thickness x	0.8x4.0
	12
	TS-35
	YES
	YES

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	30
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	30
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	30
UL/CUL AWG	24
UL/CUL AWG	10
UL/CUL AWG	24

UL/CUL	AWG	10
&		
	(YES or NO)	YES
가	(YES or NO)	YES
		120
		-40

UL

(Group B)(AWG)	24~10
(Group B)(V)	300
(Group B)(A)	30
(Group C)(AWG)	24~10
(Group C)(V)	300
(Group C)(A)	30

CUL

(Group B)(AWG)	24~10
(Group B)(V)	300
(Group B)(A)	30
(Group C)(AWG)	24~10
(Group C)(V)	300
(Group C)(A)	30

