
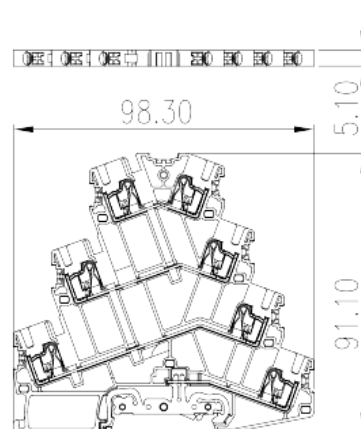


# DP2.5N-3L-SPE

DIN

>

:2026-07-05

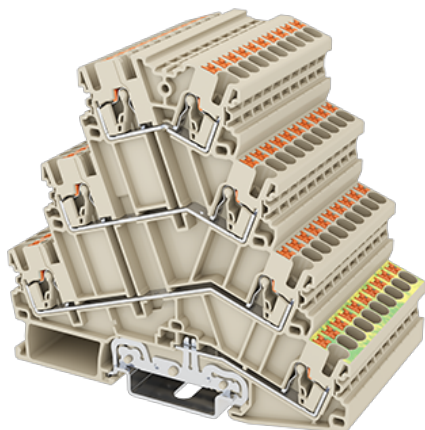

600V, 20A, Beige (default)

	Grounding Terminal Block, Push-in Design
	Grounding Terminal Blocks
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	98.3
(mm)	5.1
(mm)	91.1
( )	1P
	Four level
	7
	PA
	I
UL 94	V0
	500M at DC 500V

**-IEC**

(V)	800
(A)	24
(III/3)(V)	800
(III/3)(KV)	8
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	4
(mm <sup>2</sup> )	0.14
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
Width)(mm) (Blade thickness x	0.6x3.5
	10
	TS-35
	YES
	YES

**-UL**

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	20
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	20
UL/CUL AWG	26
UL/CUL AWG	12
UL/CUL AWG	26
UL/CUL AWG	12

**&**

(YES or NO)	YES
가 (YES or NO)	YES

	120
	-40

