


# DP4N-3L-SPE

DIN

>

:2026-05-14

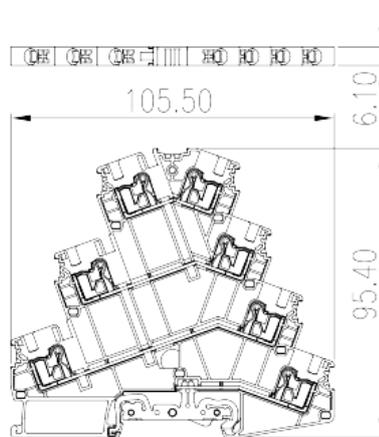

600V, 30A, Beige (default)

	Grounding Terminal Block, Push-in Design
	Grounding Terminal Blocks
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	105.5
(mm)	6.1
(mm)	95.4
( )	1P
	Four level
	7
	PA
	I
UL 94	V0
	500M at DC 500V

**-IEC**

(V)	800
(A)	32
(III/3)(V)	800
(III/3)(KV)	8
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	6
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	4
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	4
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	4
<sup>2</sup> (mm <sup>2</sup> ) , ,	0.25
<sup>2</sup> (mm <sup>2</sup> ) , ,	4
Width)(mm) (Blade thickness x	0.8x4
	12
	TS-35
	YES
	YES

**-UL**

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	30
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	30
UL/CUL AWG	24
UL/CUL AWG	10
UL/CUL AWG	24
UL/CUL AWG	10

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	26~12
(Group B)(V)	600
(Group B)(A)	30
(Group C)(AWG)	26~12
(Group C)(V)	600
(Group C)(A)	30

CUL

(Group B)(AWG)	26~12
(Group B)(V)	600
(Group B)(A)	30
(Group C)(AWG)	26~12
(Group C)(V)	600
(Group C)(A)	30

