
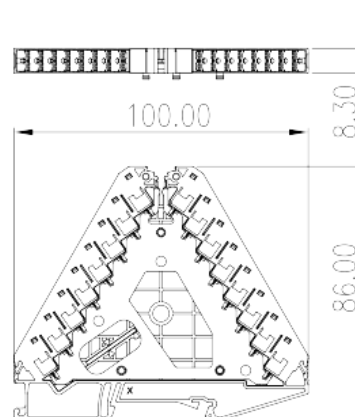


# DPD6-P002

DIN

>

:2026-07-05

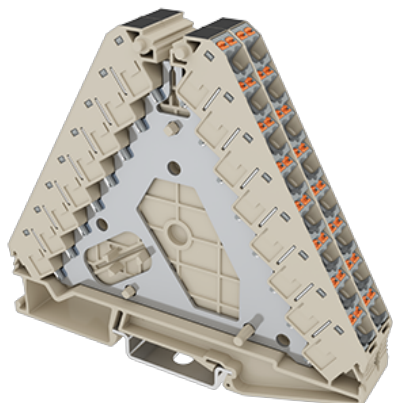

	Potential distributors Terminal Block, Push-in Design
	Potential distributors Terminal Block
	Beige (default)
	Push-in Design
(mm)	100
(mm)	8.3
(mm)	86
	Eight level
	32
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC



(V)		250
(A)		17.5
(III/3)(V)		250
(III/3)(KV)		4
(mm <sup>2</sup> )		0.14
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> )		0.14
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> )	,	0.25
(mm <sup>2</sup> )	,	1.5
(mm <sup>2</sup> )	,	0.25
(mm <sup>2</sup> )	,	1.5
Width)(mm)	(Blade thickness x	0.4x2.5
		10~11
		TS-35
		YES
		NO

**-UL**

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		15
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	26
UL/CUL	AWG	14
UL/CUL	AWG	26
UL/CUL	AWG	14

**&**

(YES or NO)		YES
가 (YES or NO)		YES
		120



-40

## UL

(Group B) (AWG)	26-14
(Group B) (V)	300
(Group B) (A)	15
(Group D) (AWG)	26-14
(Group D) (V)	300
(Group D) (A)	10

## CUL

(Group B) (AWG)	26-14
(Group B) (V)	300
(Group B) (A)	15
(Group D) (AWG)	26-14
(Group D) (V)	300
(Group D) (A)	10

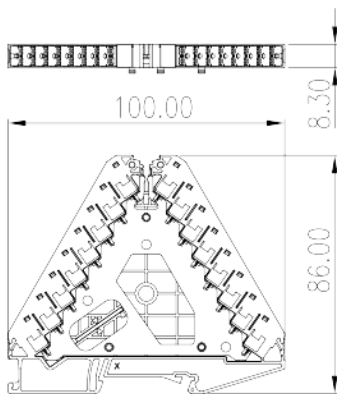



Delight Through Connections