
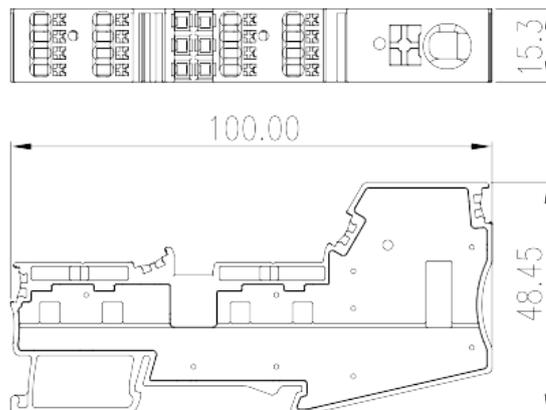


DPD10-P001

DIN

>

:2026-05-14

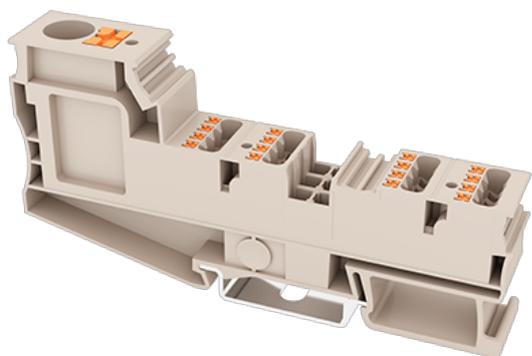

600V, 50A, Beige (default)

	Potential collective Terminal Block, Screw Connection
	Potential collective Terminal Block
(mm)	15.3
	Beige (default)
	Screw Connection / Push-in Design
	Rail Mounting
(mm)	100
(mm)	15.3
(mm)	48.5
()	1P
	Single level
	9
	PA
	I
UL 94	V0



500M at DC 500V

-IEC

(A)	Line Side: 57 / Load Side: 17.5
(III/3)(V)	1000
(III/3)(KV)	8
(mm ²)	Line Side: 0.5 / Load Side: 0.14
(mm ²)	Line Side: 16 / Load Side: 1.5
(mm ²)	Line Side: 0.5 / Load Side: 0.14
(mm ²)	Line Side: 10 / Load Side: 1.5
(mm ²) , ,	Line Side: 0.5 / Load Side: 0.25
(mm ²) , ,	Line Side: 10 / Load Side: 1.5
(mm ²) , ,	Line Side: 0.5 / Load Side: 0.25
(mm ²) , ,	Line Side: 10 / Load Side: 0.75
² (mm ²) , ,	Line Side: 1.5
² (mm ²) , ,	Line Side: 4
Width)(mm) (Blade thickness x	0.4x2.5&1x5.5
	Line Side: 17~18/ Load Side: 7~8
	TS-35
	NO
	NO

-UL

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	Line Side: 50 / Load Side: 10
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	Line Side: 50 / Load Side: 10
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	Line Side: 5 / Load Side: 5
UL/CUL AWG	Line Side: 20 / Load Side: 26
UL/CUL AWG	Line Side: 6 / Load Side: 14



UL/CUL	AWG	Line Side: 20 / Load Side: 26
UL/CUL	AWG	Line Side: 6 / Load Side: 14

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	Line Side : 20~6 / Load Side: 26~14
(Group B)(V)	600
(Group B)(A)	Line Side : 50 / Load Side: 10
(Group C)(AWG)	Line Side : 20~6 / Load Side: 26~14
(Group C)(V)	600
(Group C)(A)	Line Side : 50 / Load Side: 10
(Group D)(AWG)	Line Side : 20~6 / Load Side: 26~14
(Group D)(V)	600
(Group D)(A)	Line Side : 5 / Load Side: 5

CUL

(Group B)(AWG)	Line Side : 20~6 / Load Side: 26~14
(Group B)(V)	600
(Group B)(A)	Line Side : 50 / Load Side: 10
(Group C)(AWG)	Line Side : 20~6 / Load Side: 26~14
(Group C)(V)	600
(Group C)(A)	Line Side : 50 / Load Side: 10
(Group D)(AWG)	Line Side : 20~6 / Load Side: 26~14
(Group D)(V)	600
(Group D)(A)	Line Side : 5 / Load Side: 5

