
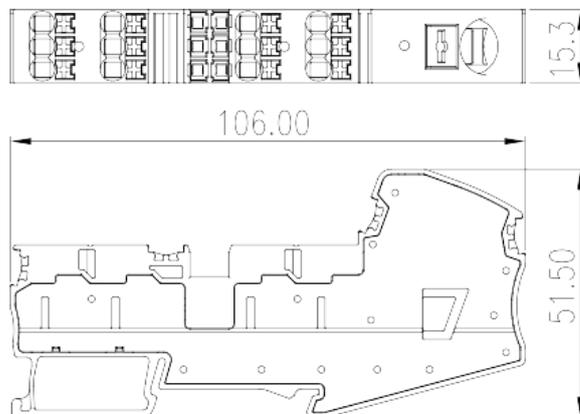


DPD16-P001

DIN

>

:2026-05-14

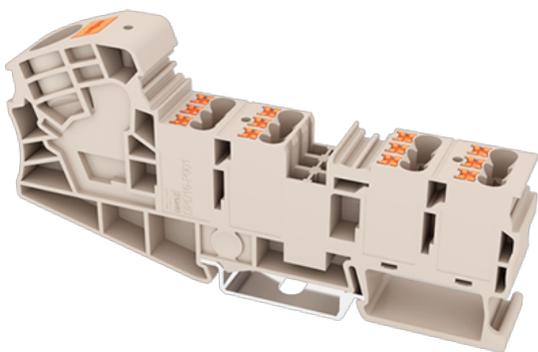

600V, 80A, Beige (default)

	Potential collective Terminal Block, Push-in Design
	Potential collective Terminal Block
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	108
(mm)	15.3
(mm)	51.5
()	1P
	Single level
	13
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)	1000
(A)	Line Side: 76 / Load Side: 24
(III/3)(V)	1000
(III/3)(KV)	Line Side: 8 / Load Side: 6
(mm ²)	Line Side: 0.5 / Load Side: 0.14
(mm ²)	Line Side: 25 / Load Side: 4
(mm ²)	Line Side: 0.5 / Load Side: 0.14
(mm ²)	Line Side: 16 / Load Side: 2.5
(mm ²) , ,	Line Side: 0.5 / Load Side: 0.25
(mm ²) , ,	Line Side: 16 / Load Side: 2.5
(mm ²) , ,	Line Side: 0.5 / Load Side: 0.25
(mm ²) , ,	Line Side: 16 / Load Side: 2.5
² (mm ²) , ,	Line Side: 1.5 / Load Side: 0.5
² (mm ²) , ,	Line Side: 4 / Load Side: 0.5
Width)(mm) (Blade thickness x	0.6x3.5 & 1x5.5
	Line Side: 17~18/ Load Side: 9~10
	TS-35
	NO
	NO

-UL

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	80 (Line) 20 (Load)
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	80 (Line) 20 (Load)
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	5
UL/CUL AWG	Line Side: 20 / Load Side: 26
UL/CUL AWG	Line Side: 4 / Load Side: 12
UL/CUL AWG	Line Side: 20 / Load Side: 26

UL/CUL	AWG	Line Side: 4 / Load Side: 12
&		
	(YES or NO)	YES
가	(YES or NO)	YES
		120
		-40

UL

(Group B)(AWG)	Line Side : 20~4 / Load Side: 26~12
(Group B)(V)	600
(Group B)(A)	Line Side : 80 / Load Side: 20
(Group C)(AWG)	Line Side : 20~4 / Load Side: 26~12
(Group C)(V)	600
(Group C)(A)	Line Side : 80 / Load Side: 20

CUL

(Group B)(AWG)	Line Side : 20~4 / Load Side: 26~12
(Group B)(V)	600
(Group B)(A)	Line Side : 80 / Load Side: 20
(Group C)(AWG)	Line Side : 20~4 / Load Side: 26~12
(Group C)(V)	600
(Group C)(A)	Line Side : 80 / Load Side: 20

