
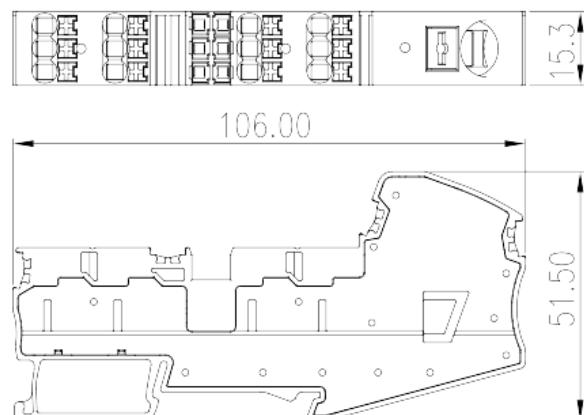


# DPD16-P001

DIN

&gt;

:2026-02-09

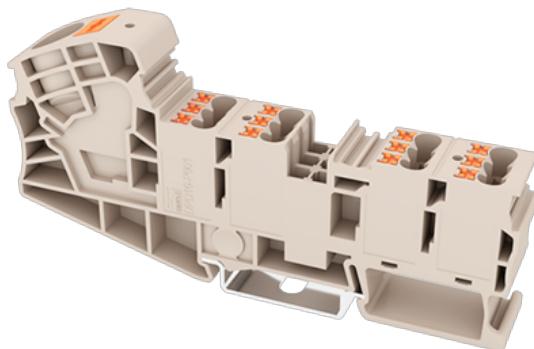

600V, 80A, Beige (default)

	Potential collective Terminal Block, Push-in Design
	Potential collective Terminal Block
	Beige (default)
	Push-in Design
(mm)	108
(mm)	15.3
(mm)	51.5
	Single level
	13

UL 94	PA I V0 500M at DC 500V
-------	----------------------------------

-IEC

(A)	Line Side: 76 / Load Side: 24
-----	-------------------------------

(III/3)(V)		1000
(III/3)(KV)		Line Side: 8 / Load Side: 6
(mm <sup>2</sup> )		Line Side: 0.5 / Load Side: 0.14
(mm <sup>2</sup> )		Line Side: 25 / Load Side: 4
(mm <sup>2</sup> )		Line Side: 0.5 / Load Side: 0.14
(mm <sup>2</sup> )		Line Side: 16 / Load Side: 2.5
(mm <sup>2</sup> ) , ,		Line Side: 0.5 / Load Side: 0.25
(mm <sup>2</sup> ) , ,		Line Side: 16 / Load Side: 2.5
(mm <sup>2</sup> ) , ,		Line Side: 0.5 / Load Side: 0.25
(mm <sup>2</sup> ) , ,		Line Side: 16 / Load Side: 2.5
2 (mm <sup>2</sup> ) , ,		Line Side: 1.5 / Load Side: 0.5
2 (mm <sup>2</sup> ) , ,		Line Side: 4 / Load Side: 0.5
		TS-35

### -UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		80 ( Line ) 20 ( Load )
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		80 ( Line ) 20 ( Load )
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		5
UL/CUL	AWG	Line Side: 20 / Load Side: 26
UL/CUL	AWG	Line Side: 4 / Load Side: 12
UL/CUL	AWG	Line Side: 20 / Load Side: 26
UL/CUL	AWG	Line Side: 4 / Load Side: 12

&

(YES or NO)		YES
가 (YES or NO)		YES
		120
		-40

**UL**

(Group B)(AWG)	Line Side : 20~4 / Load Side: 26~12
(Group B)(V)	600
(Group B)(A)	Line Side : 80 / Load Side: 20
(Group C)(AWG)	Line Side : 20~4 / Load Side: 26~12
(Group C)(V)	600
(Group C)(A)	Line Side : 80 / Load Side: 20

**CUL**

(Group B)(AWG)	Line Side : 20~4 / Load Side: 26~12
(Group B)(V)	600
(Group B)(A)	Line Side : 80 / Load Side: 20
(Group C)(AWG)	Line Side : 20~4 / Load Side: 26~12
(Group C)(V)	600
(Group C)(A)	Line Side : 80 / Load Side: 20

