



DPD16-P001

DIN > :2025-11-05

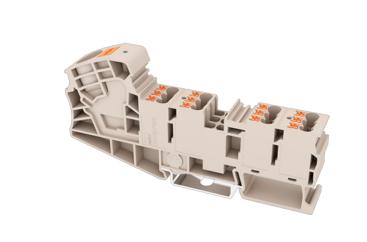

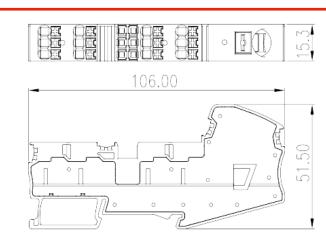

600V, 80A, Beige (default)

	Potential collective Terminal Block, Push-in Design
	Potential collective Terminal Block
	Beige (default)
	Push-in Design
mm)	108
mm)	15.3
(mm)	51.5
	Single level
	13

	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(A) Line Side: 76 / Load Side: 24



(III/3)(V)		1000
(III/3)(KV)		Line Side: 8 / Load Side: 6
(mm ²)		Line Side: 0.5 / Load Side: 0.14
(mm ²)		Line Side: 25 / Load Side: 4
(mm²)		Line Side: 0.5 / Load Side: 0.14
(mm²)		Line Side: 16 / Load Side: 2.5
(mm ²)	,	Line Side: 0.5 / Load Side: 0.25
(mm ²)	,	Line Side: 16 / Load Side: 2.5
(mm ²)	,	Line Side: 0.5 / Load Side: 0.25
(mm ²)	,	Line Side: 16 / Load Side: 2.5
	$\frac{2}{(\text{mm}^2)}$, ,	Line Side: 1.5 / Load Side: 0.5
	2 , , , , , , , ,	Line Side: 4 / Load Side: 0.5
		TS-35
- L	JL	
(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		80 (Line) 20 (Load)
(UL/CUL	Group C)(V)	600
(UL/CUL	Group C)(A)	80 (Line) 20 (Load)
(UL/CUL Group D)(V)		600
(UL/CUL	Group D)(A)	5
UL/CUL	AWG	Line Side: 20 / Load Side: 26
UL/CUL	AWG	Line Side: 4 / Load Side: 12
UL/CUL	AWG	Line Side: 20 / Load Side: 26
UL/CUL	AWG	Line Side: 4 / Load Side: 12
&		
(YES o	or NO)	YES
가 (YES or NO)		YES
		120
		-40



UL

(Group B)(AWG)	Line Side: 20~4 / Load Side: 26~12
(Group B)(V)	600
(Group B)(A)	Line Side: 80 / Load Side: 20
(Group C)(AWG)	Line Side: 20~4 / Load Side: 26~12
(Group C)(V)	600
(Group C)(A)	Line Side: 80 / Load Side: 20

CUL

(Group B)(AWG)	Line Side: 20~4 / Load Side: 26~12
(Group B)(V)	600
(Group B)(A)	Line Side: 80 / Load Side: 20
(Group C)(AWG)	Line Side: 20~4 / Load Side: 26~12
(Group C)(V)	600
(Group C)(A)	Line Side: 80 / Load Side: 20

