
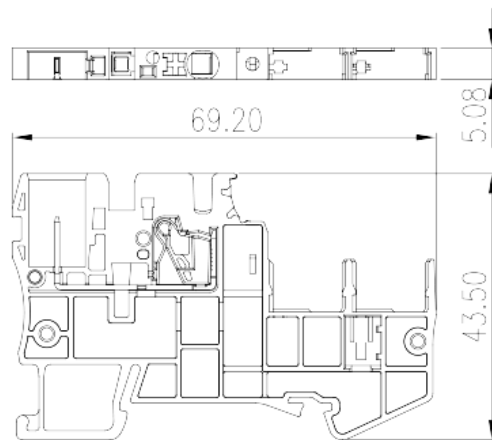


DP2.5SGT

DIN

>

:2026-07-05

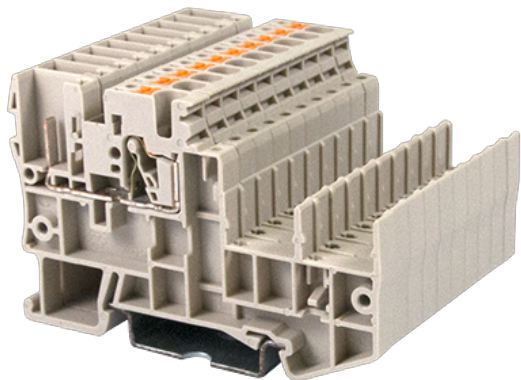

600V, 20A, Beige (default)

	Plug-in Connection Terminal Block, Push-in Design
	Plug-in Connection Terminal Block
(mm)	5.08
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	69.2
(mm)	5.08
(mm)	43.5
()	1P
	Single level
	1
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)		400
(A)		24
(III/3)(V)		400
(III/3)(KV)		6
(mm ²)		0.2
(mm ²)		4
(mm ²)		0.2
(mm ²)		2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
² (mm ²)	,	0.5
² (mm ²)	,	0.5
Width)(mm)	(Blade thickness x	0.6x3.5
		9~10
		TS-35
		YES
		NO

-UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		20
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		20
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		5
UL/CUL	AWG	26
UL/CUL	AWG	12
UL/CUL	AWG	26



UL/CUL	AWG	12
&		
	(YES or NO)	YES
가	(YES or NO)	YES
		120
		-40

UL

	(Group B)(AWG)	26~12
	(Group B)(V)	600
	(Group B)(A)	20
	(Group C)(AWG)	26~12
	(Group C)(V)	600
	(Group C)(A)	20
	(Group D)(AWG)	26~12
	(Group D)(V)	600
	(Group D)(A)	5

CUL

	(Group B)(AWG)	26~12
	(Group B)(V)	600
	(Group B)(A)	20
	(Group C)(AWG)	26~12
	(Group C)(V)	600
	(Group C)(A)	20
	(Group D)(AWG)	26~12
	(Group D)(V)	600
	(Group D)(A)	5

--	--	--

