
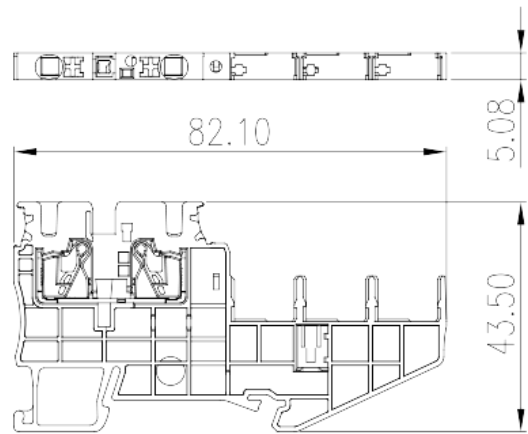


DP2.5SGR

DIN

>

:2026-07-05

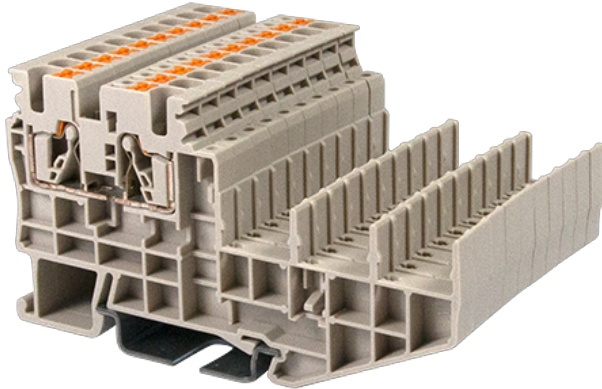

600V, 20A, Beige (default)

	Sensor Terminal Block, Push-in Design, Width:5.08mm, 600V, 20A
	Sensor Terminal Block
(mm)	5.08
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	82.1
(mm)	5.08
(mm)	43.5
()	1P
	Single level
	2
	PA
	I
UL 94	V0



500M at DC 500V

-IEC

(V)	400
(A)	24
(III/3)(V)	400
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	4
(mm ²)	0.2
(mm ²)	2.5
(mm ²) , ,	0.25
(mm ²) , ,	2.5
(mm ²) , ,	0.25
(mm ²) , ,	2.5
² (mm ²) , ,	0.5
² (mm ²) , ,	0.5
Width)(mm) (Blade thickness x	0.6x3.5
	8~10
	TS-35
	YES
	NO

-UL

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	20
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	20
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	5
UL/CUL AWG	26



UL/CUL	AWG	12
UL/CUL	AWG	26
UL/CUL	AWG	12

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	26~12
(Group B)(V)	600
(Group B)(A)	20
(Group C)(AWG)	26~12
(Group C)(V)	600
(Group C)(A)	20
(Group D)(AWG)	26~12
(Group D)(V)	600
(Group D)(A)	5

CUL

(Group B)(AWG)	26~12
(Group B)(V)	600
(Group B)(A)	20
(Group C)(AWG)	26~12
(Group C)(V)	600
(Group C)(A)	20
(Group D)(AWG)	26~12
(Group D)(V)	600
(Group D)(A)	5

--	--

