


DPES2.5QK04

DIN

>

:2026-02-09

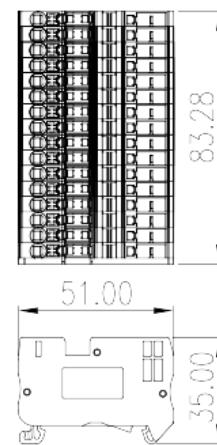

600V, 20A, Beige (default)

	Plug-in Connection Terminal Block, Push-in Design
	Plug-in Connection Terminal Block
(mm)	5.08
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	83.3
(mm)	60
(mm)	84
()	16
	Single level
	32

UL 94	PA
	I
	V0

500M at DC 500V

-IEC

(V)		800
(A)		24
(III/3)(V)		800
(III/3)(KV)		8
(mm ²)		0.14
(mm ²)		4
(mm ²)		0.14
(mm ²)		2.5
(mm ²) , , ,		0.25
(mm ²) , , ,		2.5
(mm ²) , , ,		0.25
(mm ²) , , ,		2.5
2 (mm ²) , , ,		0.5
2 (mm ²) , , ,		0.5
Width)(mm)	(Blade thickness x	0.6x3.5
		9~10
		TS-35
		YES
		NO

-UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		20
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		20
UL/CUL	AWG	26
UL/CUL	AWG	12
UL/CUL	AWG	26
UL/CUL	AWG	12

&


(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B)(AWG)	26~12
(Group B)(V)	600
(Group B)(A)	20
(Group C)(AWG)	26~12
(Group C)(V)	600
(Group C)(A)	20

CUL

(Group B)(AWG)	26~12
(Group B)(V)	600
(Group B)(A)	20
(Group C)(AWG)	26~12
(Group C)(V)	600
(Group C)(A)	20

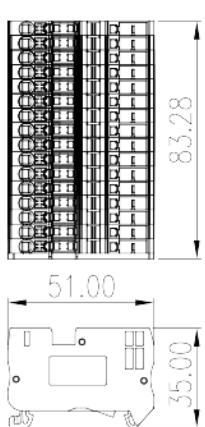



Delight Through Connections

