
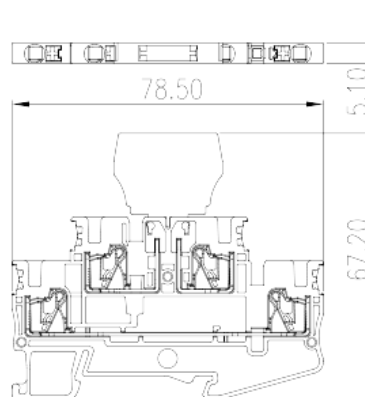


DPP2.5N-CP

DIN

>

:2026-07-05

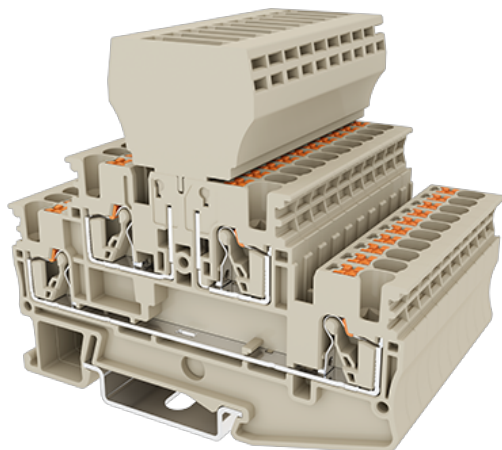

300V, Upper : 6A / Lower : 20A, Beige (default)

| | |
|-------|--|
| | Bi-level Disconnect Terminal Block, Push-in Design |
| | Bi-level Disconnect Terminal Block |
| | Beige (default) |
| | Push-in Design |
| | Rail Mounting |
| (mm) | 78.5 |
| (mm) | 5.1 |
| (mm) | 67.2 |
| () | 2P |
| | Double level |
| | 4 |
| | PA |
| | I |
| UL 94 | V0 |
| | 500M at DC 500V |

-IEC

| | |
|-------------------------------------|---------|
| (V) | 400 |
| (A) | 20 |
| (III/3)(V) | 400 |
| (III/3)(KV) | 6 |
| (mm ²) | 0.2 |
| (mm ²) | 4 |
| (mm ²) | 0.2 |
| (mm ²) | 2.5 |
| (mm ²) , , | 0.25 |
| (mm ²) , , | 2.5 |
| (mm ²) , , | 0.25 |
| (mm ²) , , | 2.5 |
| ² (mm ²) , , | 0.5 |
| ² (mm ²) , , | 0.5 |
| Width)(mm) (Blade thickness x | 0.6x3.5 |
| | 10 |
| | TS-35 |
| | YES |
| | NO |

-UL

| | |
|---------------------|--------------------------|
| (UL/CUL Group B)(V) | 300 |
| (UL/CUL Group B)(A) | Upper : 6A / Lower : 20A |
| (UL/CUL Group C)(V) | 300 |
| (UL/CUL Group C)(A) | Upper : 6A / Lower : 20A |
| UL/CUL AWG | 26 |
| UL/CUL AWG | 12 |
| UL/CUL AWG | 26 |
| UL/CUL AWG | 12 |

&

| | |
|---------------|-----|
| (YES or NO) | YES |
| 가 (YES or NO) | YES |
| | 120 |
| | -40 |

UL

| | |
|----------------|--------------------------|
| (Group B)(AWG) | 26~12 |
| (Group B)(V) | 300 |
| (Group B)(A) | Upper : 6A / Lower : 20A |
| (Group C)(AWG) | 26~12 |
| (Group C)(V) | 300 |
| (Group C)(A) | Upper : 6A / Lower : 20A |

CUL

| | |
|----------------|--------------------------|
| (Group B)(AWG) | 26~12 |
| (Group B)(V) | 300 |
| (Group B)(A) | Upper : 6A / Lower : 20A |
| (Group C)(AWG) | 26~12 |
| (Group C)(V) | 300 |
| (Group C)(A) | Upper : 6A / Lower : 20A |

