
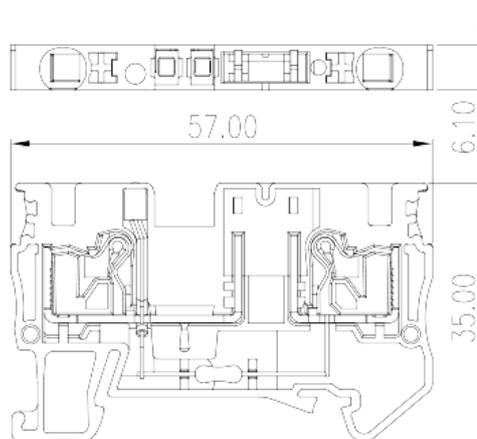


DP4N-TFULXX

DIN

>

:2026-05-14

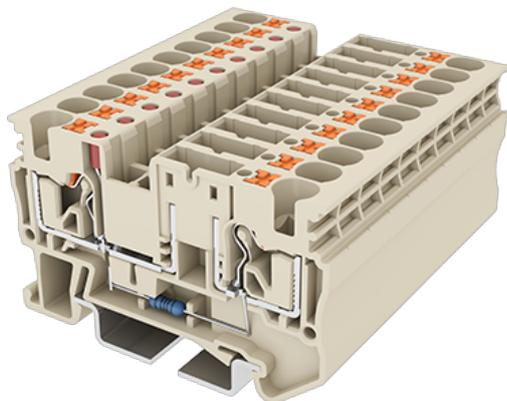

12V/24V/48V, 15A, Beige (default)

	Fuse Terminal Block, Push-in Design
	Fuse Terminal Block
	Beige (default)
	Push-in Design
	Rail Mounting
(mm)	57
(mm)	6.1
(mm)	35
()	1P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC

(V)	12/24/48
(A)	10
(III/3)(V)	12/24/48
(III/3)(KV)	6
(mm ²)	0.2
(mm ²)	6
(mm ²)	0.2
(mm ²)	4
(mm ²) , ,	0.25
(mm ²) , ,	4
(mm ²) , ,	0.25
(mm ²) , ,	4
² (mm ²) , ,	0.5
² (mm ²) , ,	1
Width)(mm) (Blade thickness x	0.8x4
	12
	TS-35
	YES
	NO

-UL

(UL/CUL Group B)(V)	12/24/48
(UL/CUL Group B)(A)	15
(UL/CUL Group C)(V)	12/24/48
(UL/CUL Group C)(A)	15
UL/CUL AWG	24
UL/CUL AWG	10
UL/CUL AWG	24
UL/CUL AWG	10

&



(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

UL

(Group B) (AWG)	24~10
(Group B) (V)	12/24/48
(Group B) (A)	15
(Group C) (AWG)	24~10
(Group C) (V)	12/24/48
(Group C) (A)	15

CUL

(Group B) (AWG)	24~10
(Group B) (V)	12/24/48
(Group B) (A)	15
(Group C) (AWG)	24~10
(Group C) (V)	12/24/48
(Group C) (A)	15

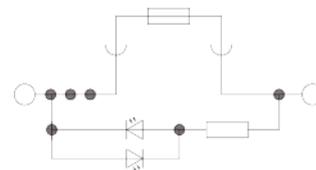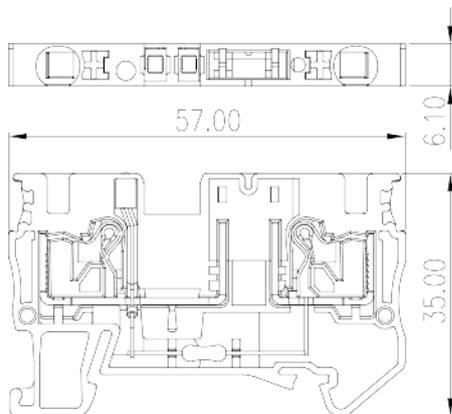

* DP4N-TFULXX with LED display.

Part number	LED	Voltage
DP4N-TFUL12	with LED light	12V
DP4N-TFUL24	with LED light	24V
DP4N-TFUL48	with LED light	48V

