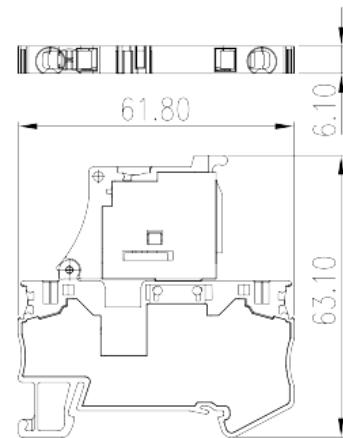


# AK4-TFLXX

DIN

&gt;

:2026-02-10



300V, 11A, Beige (default)

	DIN Rail terminal blocks, Fuse terminal blocks
	Fuse terminal blocks
	Beige (default)
	Spring Clamp Connection
	Rail Mounting
(mm)	6.1
(mm)	61.8
(mm)	63.1
	Single level
	2

UL 94	PA I V0 500M at DC 500V
-------	----------------------------------

-IEC

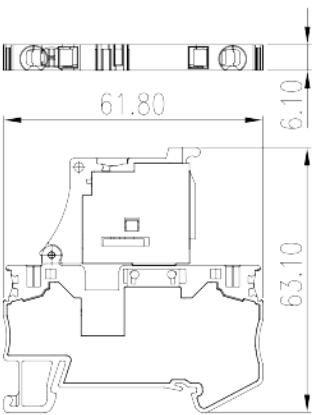
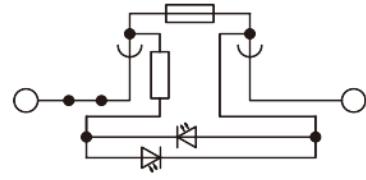
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm <sup>2</sup> )		0.2
(mm <sup>2</sup> )		6
(mm <sup>2</sup> )		0.2
(mm <sup>2</sup> )		4
(mm <sup>2</sup> ) , , ,		0.25
(mm <sup>2</sup> ) , , ,		4
(mm <sup>2</sup> ) , , ,		0.25
(mm <sup>2</sup> ) , , ,		4
<sup>2</sup> (mm <sup>2</sup> ) , , ,		0.5
<sup>2</sup> (mm <sup>2</sup> ) , , ,		1
Width)(mm)	(Blade thickness x	0.6x3.5
		10
		TS-35
		NO
		NO

### -UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		11
(UL/CUL Group C)(V)		300
(UL/CUL Group C)(A)		11
(UL/CUL Group D)(V)		600
(UL/CUL Group D)(A)		10
UL/CUL	AWG	28
UL/CUL	AWG	10
UL/CUL	AWG	28
UL/CUL	AWG	10

&amp;

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

	
--	--

\* AK4-TFLXX(5X20) with LED display.

Part number	LED	Voltage
AK4-TFL5(5X20)	with LED light	5V
AK4-TFL12(5X20)	with LED light	12V
AK4-TFL24(5X20)	with LED light	24V
AK4-TFL48(5X20)	with LED light	48V
AK4-TFL110(5X20)	with LED light	110V
AK4-TFL220(5X20)	with LED light	220V
AK4-TFL300(5X20)	with LED light	300V

