


AK4-TFLXX

DIN

>

:2026-05-14

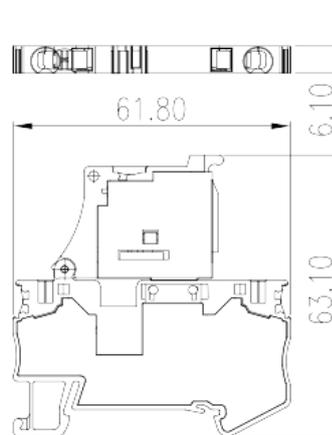

300V, 11A, Beige (default)

	DIN Rail terminal blocks, Fuse terminal blocks
	Fuse terminal blocks
	Beige (default)
	Spring Clamp Connection
	Rail Mounting
(mm)	6.1
(mm)	61.8
(mm)	63.1
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V

-IEC



(II/2)(KV)	6
(III/2)(KV)	6
(III/3)(KV)	6
(mm ²)	0.2
(mm ²)	6
(mm ²)	0.2
(mm ²)	4
(mm ²) , ,	0.25
(mm ²) , ,	4
(mm ²) , ,	0.25
(mm ²) , ,	4
2 (mm ²) , ,	0.5
2 (mm ²) , ,	1
Width)(mm) (Blade thickness x	0.6x3.5
	10
	TS-35
	NO
	NO

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	11
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	11
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	10
UL/CUL AWG	28
UL/CUL AWG	10
UL/CUL AWG	28
UL/CUL AWG	10

&

(YES or NO)	YES
가 (YES or NO)	YES
	120
	-40

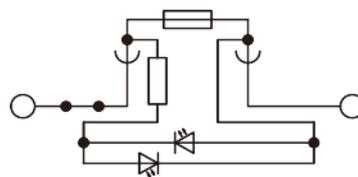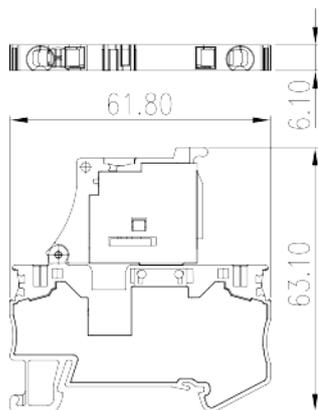

* AK4-TFLXX(5X20) with LED display.

Part number	LED	Voltage
AK4-TFL5(5X20)	with LED light	5V
AK4-TFL12(5X20)	with LED light	12V
AK4-TFL24(5X20)	with LED light	24V
AK4-TFL48(5X20)	with LED light	48V
AK4-TFL110(5X20)	with LED light	110V
AK4-TFL220(5X20)	with LED light	220V
AK4-TFL300(5X20)	with LED light	300V

