
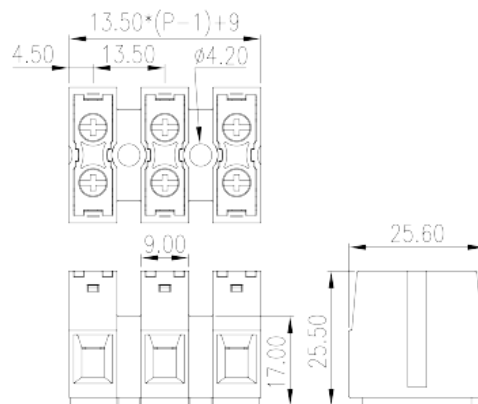


PM6H-16P

NEMA

>

:2026-07-05

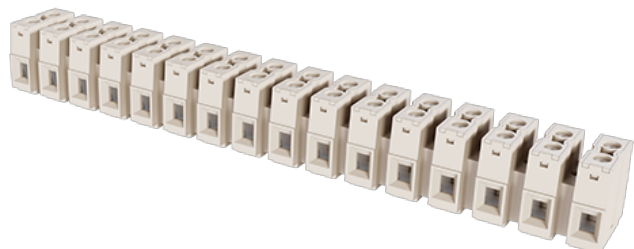

300V, 50A, Beige (default)

	Panel Mounting
(mm)	13.5
	Refer to drawing
	Screw Connection
	With mounting flange
(mm)	$13.5*(P-1)+9$
(mm)	25.6
(mm)	25.5
()	02P~16P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

		Tin PLATED
-IEC		
(V)		800
(A)		57
(II/2)(V)		1000
(III/2)(V)		1000
(III/3)(V)		800
(II/2)(KV)		8
(III/2)(KV)		8
(III/3)(KV)		8
(mm ²)		0.5
(mm ²)		10
(mm ²)		0.5
(mm ²)		10
(mm ²)	,	0.5
(mm ²)	,	4
(mm ²)	,	0.5
(mm ²)	,	4
2	(mm ²)	0.5
2	(mm ²)	4
2	(mm ²)	0.5
2	(mm ²)	4
(mm ²) ²	,	0.5
(mm ²) ²	,	2.5
(mm ²) ²	,	0.5
(mm ²) ²	,	2.5
		M4
Width)(mm)	(Blade thickness x	0.8x4
Philips		PH2



(N.m)	0.9
(N.m)	1.2
	9~10

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	50
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	50
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	5
UL/CUL AWG	20
UL/CUL AWG	8
UL/CUL AWG	20
UL/CUL AWG	8

&

(YES or NO)	YES
가 (YES or NO)	NO
	120
	-40

UL

(Group B)(AWG)	20~8
(Group B)(V)	300
(Group B)(A)	50
(Group C)(AWG)	20~8
(Group C)(V)	300
(Group C)(A)	50

CUL

(Group B)(AWG)	20~8
(Group B)(V)	300
(Group B)(A)	50
(Group C)(AWG)	20~8

(Group C)(V)	300
(Group C)(A)	50

