


PM6H-16P

NEMA

>

:2026-05-14

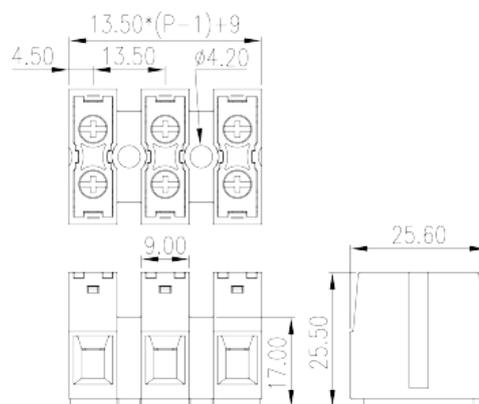

300V, 50A, Beige (default)

	Panel Mounting
(mm)	13.5
	Refer to drawing
	Screw Connection
	With mounting flange
(mm)	$13.5*(P-1)+9$
(mm)	25.6
(mm)	25.5
()	02P~16P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY



Tin PLATED

-IEC

(V)	800
(A)	57
(II/2)(V)	1000
(III/2)(V)	1000
(III/3)(V)	800
(II/2)(KV)	8
(III/2)(KV)	8
(III/3)(KV)	8
(mm ²)	0.5
(mm ²)	10
(mm ²)	0.5
(mm ²)	10
(mm ²) , ,	0.5
(mm ²) , ,	4
(mm ²) , ,	0.5
(mm ²) , ,	4
2 (mm ²)	0.5
2 (mm ²)	4
2 (mm ²)	0.5
2 (mm ²)	4
(mm ²) ² , ,	0.5
(mm ²) ² , ,	2.5
2 (mm ²) , ,	0.5
2 (mm ²) , ,	2.5
	M4
Width)(mm) (Blade thickness x	0.8x4
Philips	PH2

(N.m)	0.9
(N.m)	1.2
	9~10

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	50
(UL/CUL Group C)(V)	300
(UL/CUL Group C)(A)	50
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	5
UL/CUL AWG	20
UL/CUL AWG	8
UL/CUL AWG	20
UL/CUL AWG	8

&

(YES or NO)	YES
가 (YES or NO)	NO
	120
	-40

UL

(Group B)(AWG)	20~8
(Group B)(V)	300
(Group B)(A)	50
(Group C)(AWG)	20~8
(Group C)(V)	300
(Group C)(A)	50

CUL

(Group B)(AWG)	20~8
(Group B)(V)	300
(Group B)(A)	50
(Group C)(AWG)	20~8

(Group C)(V)	300
(Group C)(A)	50

