


PM16H-16P

NEMA

>

:2026-03-30

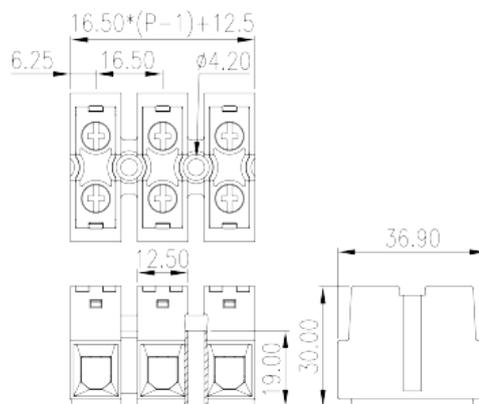

600V, 100A, Beige (default)

	Panel Mounting
(mm)	16.5
	Refer to drawing
	Screw Connection
	With mounting flange
(mm)	$16.5 * (P - 1) + 12.5$
(mm)	36.9
(mm)	30
()	02P~16P
	Single level
	2
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY



Tin PLATED

-IEC

(V)	1000
(A)	76
(II/2)(V)	1000
(III/2)(V)	1000
(III/3)(V)	1000
(II/2)(KV)	8
(III/2)(KV)	8
(III/3)(KV)	8
(mm ²)	1.5
(mm ²)	16
(mm ²)	1.5
(mm ²)	16
(mm ²) , ,	1.5
(mm ²) , ,	16
(mm ²) , ,	1.5
(mm ²) , ,	16
2 (mm ²)	1.5
2 (mm ²)	6
2 (mm ²)	1.5
2 (mm ²)	6
(mm ²) ² , ,	1.5
(mm ²) ² , ,	6
2 (mm ²) , ,	1.5
2 (mm ²) , ,	6
	M5
Width)(mm) (Blade thickness x	1.0x5.5
Philips	PH2

(N.m)	2
(N.m)	2.5
(N.m)	1.2
	14~16

-UL

(UL/CUL Group B)(V)	600
(UL/CUL Group B)(A)	100
(UL/CUL Group C)(V)	600
(UL/CUL Group C)(A)	100
(UL/CUL Group D)(V)	600
(UL/CUL Group D)(A)	5
UL/CUL AWG	14
UL/CUL AWG	3
UL/CUL AWG	14
UL/CUL AWG	3

&

(YES or NO)	YES
가 (YES or NO)	NO
	120
	-40

UL

(Group B)(AWG)	14~3
(Group B)(V)	600
(Group B)(A)	100
(Group C)(AWG)	14~3
(Group C)(V)	600
(Group C)(A)	100

CUL

(Group B)(AWG)	14~3
(Group B)(V)	600
(Group B)(A)	100

(Group C) (AWG)	14~3
(Group C) (V)	600
(Group C) (A)	100

VDE

(mm ²)	1.5~16
(V)	1000
(A)	76

