
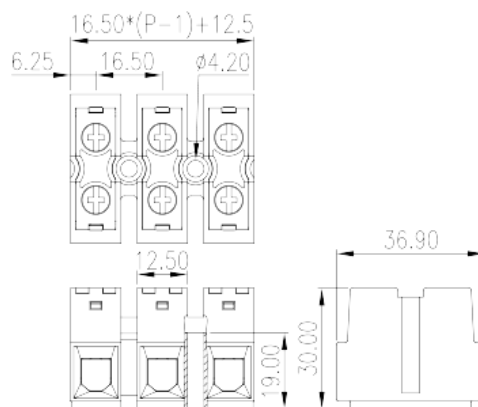


# PM16H-16P

NEMA

>

:2026-07-04

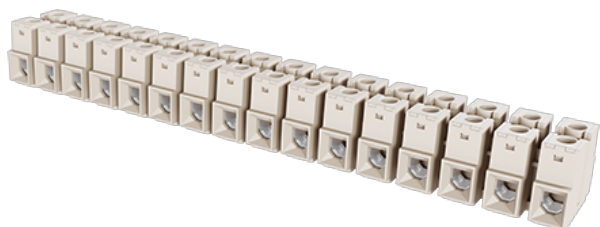

600V, 100A, Beige (default)

|       |                         |
|-------|-------------------------|
|       | Panel Mounting          |
| (mm)  | 16.5                    |
|       | Refer to drawing        |
|       | Screw Connection        |
|       | With mounting flange    |
| (mm)  | $16.5 * (P - 1) + 12.5$ |
| (mm)  | 36.9                    |
| (mm)  | 30                      |
| ( )   | 02P~16P                 |
|       | Single level            |
|       | 2                       |
|       | PA                      |
|       | I                       |
| UL 94 | V0                      |
|       | 500M at DC 500V         |
|       | COPPER ALLOY            |



Tin PLATED

**-IEC**

|                                     |         |
|-------------------------------------|---------|
| (V)                                 | 1000    |
| (A)                                 | 76      |
| (II/2)(V)                           | 1000    |
| (III/2)(V)                          | 1000    |
| (III/3)(V)                          | 1000    |
| (II/2)(KV)                          | 8       |
| (III/2)(KV)                         | 8       |
| (III/3)(KV)                         | 8       |
| (mm <sup>2</sup> )                  | 1.5     |
| (mm <sup>2</sup> )                  | 16      |
| (mm <sup>2</sup> )                  | 1.5     |
| (mm <sup>2</sup> )                  | 16      |
| (mm <sup>2</sup> ) , ,              | 1.5     |
| (mm <sup>2</sup> ) , ,              | 16      |
| (mm <sup>2</sup> ) , ,              | 1.5     |
| (mm <sup>2</sup> ) , ,              | 16      |
| 2 (mm <sup>2</sup> )                | 1.5     |
| 2 (mm <sup>2</sup> )                | 6       |
| 2 (mm <sup>2</sup> )                | 1.5     |
| 2 (mm <sup>2</sup> )                | 6       |
| (mm <sup>2</sup> ) <sup>2</sup> , , | 1.5     |
| (mm <sup>2</sup> ) <sup>2</sup> , , | 6       |
| 2 (mm <sup>2</sup> ) , ,            | 1.5     |
| 2 (mm <sup>2</sup> ) , ,            | 6       |
|                                     | M5      |
| Width)(mm) (Blade thickness x       | 1.0x5.5 |
| Philips                             | PH2     |



|       |       |
|-------|-------|
| (N.m) | 2     |
| (N.m) | 2.5   |
| (N.m) | 1.2   |
|       | 14~16 |

**-UL**

|                     |     |
|---------------------|-----|
| (UL/CUL Group B)(V) | 600 |
| (UL/CUL Group B)(A) | 100 |
| (UL/CUL Group C)(V) | 600 |
| (UL/CUL Group C)(A) | 100 |
| (UL/CUL Group D)(V) | 600 |
| (UL/CUL Group D)(A) | 5   |
| UL/CUL AWG          | 14  |
| UL/CUL AWG          | 3   |
| UL/CUL AWG          | 14  |
| UL/CUL AWG          | 3   |

**&**

|               |     |
|---------------|-----|
| (YES or NO)   | YES |
| 가 (YES or NO) | NO  |
|               | 120 |
|               | -40 |

**UL**

|                |      |
|----------------|------|
| (Group B)(AWG) | 14~3 |
| (Group B)(V)   | 600  |
| (Group B)(A)   | 100  |
| (Group C)(AWG) | 14~3 |
| (Group C)(V)   | 600  |
| (Group C)(A)   | 100  |

**CUL**

|                |      |
|----------------|------|
| (Group B)(AWG) | 14~3 |
| (Group B)(V)   | 600  |
| (Group B)(A)   | 100  |

|                 |      |
|-----------------|------|
| (Group C) (AWG) | 14~3 |
| (Group C) (V)   | 600  |
| (Group C) (A)   | 100  |

**VDE**

|                    |        |
|--------------------|--------|
| (mm <sup>2</sup> ) | 1.5~16 |
| (V)                | 1000   |
| (A)                | 76     |

