


0136-23XX

PCB > PCB

:2026-07-06

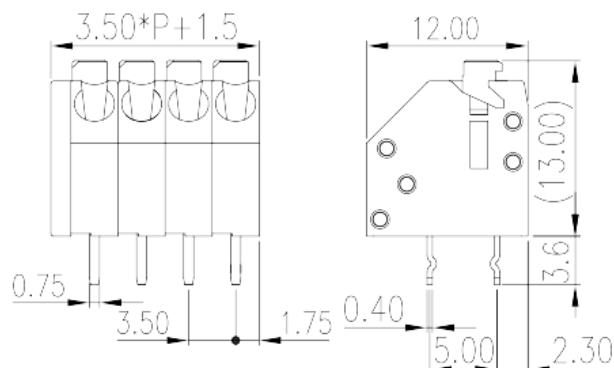

Pitch : 3.50 mm, 300V, 6A

		PCB Terminal Blocks, Push-in Design
		PCB Terminal Blocks
(mm)		3.5
		Grey (default)
		Push-in Design
		Without
		Wave Soldering
(mm)		$3.50 \times P + 1.5$
(mm)		12
(mm)		13
(x) (mm)		0.4x0.75
PCB (mm)		1.0
		02P~24P
		PA
		I
UL 94		V0



	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	400
(A)	8
(II/2)(V)	630
(III/2)(V)	400
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	0.75
(mm ²)	0.5
(mm ²)	0.75
(mm ²)	0.25
(mm ²)	0.75
(mm ²)	0.25
(mm ²)	0.5
Philips	0.4x2.5
	8~9

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	6
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	6
UL/CUL AWG	28
UL/CUL AWG	16
UL/CUL AWG	28
UL/CUL AWG	16

&

가	(YES or NO)	YES
		120
		-40

UL

(Group B) (AWG)	28~16(SOL)
(Group B) (V)	300
(Group B) (A)	6
(Group D) (AWG)	28~16(SOL)
(Group D) (V)	300
(Group D) (A)	6

CUL

(Group B) (AWG)	28~16(SOL)
(Group B) (V)	300
(Group B) (A)	6
(Group D) (AWG)	28~16(SOL)
(Group D) (V)	300
(Group D) (A)	6

