
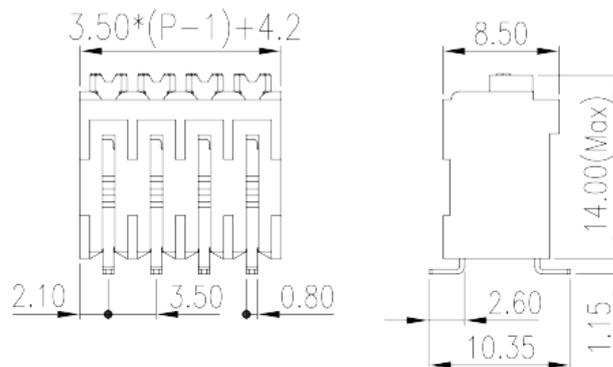


0138-50XXSMDW R

PCB > PCB

:2026-05-14

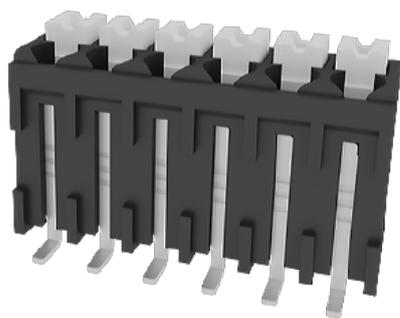

Pitch :3.50mm, 300V, 12A

PCB Terminal Blocks, Push-in Design	
PCB Terminal Blocks	
(mm)	3.50
	Black (default)
	Push in design
	Without
	Reflow Soldering
(mm)	$3.50 \times (P-1) + 4.2$
(mm)	8.5
(mm)	14
(x) (mm)	0.35x0.8
PCB (mm)	1.4x4
()	02P~06P
	Single level



	HIGH-TEMPERATURE PLASTICS
	IIIa
UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

-IEC

(V)	160
(A)	17.5
(II/2)(V)	250
(III/2)(V)	160
(III/3)(V)	160
(II/2)(KV)	2.5
(III/2)(KV)	2.5
(III/3)(KV)	2.5
(mm ²)	0.14
(mm ²)	1.5
(mm ²)	0.14
(mm ²)	1.5
(mm ²) , ,	0.25
(mm ²) , ,	0.75
(mm ²) , ,	0.25
(mm ²) , ,	0.75
Philips	0.4x2.5
	8~9

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	12
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	12
UL/CUL AWG	28



UL/CUL	AWG	16
UL/CUL	AWG	28
UL/CUL	AWG	16

&

가	(YES or NO)	YES
		120
		-40

UL

(Group B)(AWG)		28~16
(Group B)(V)		300
(Group B)(A)		12
(Group D)(AWG)		28~16
(Group D)(V)		300
(Group D)(A)		12

CUL

(Group B)(AWG)		28~16
(Group B)(V)		300
(Group B)(A)		12
(Group D)(AWG)		28~16
(Group D)(V)		300
(Group D)(A)		12

--	--	--

