


# 0257-12XX

PCB > PCB -

:2026-03-29

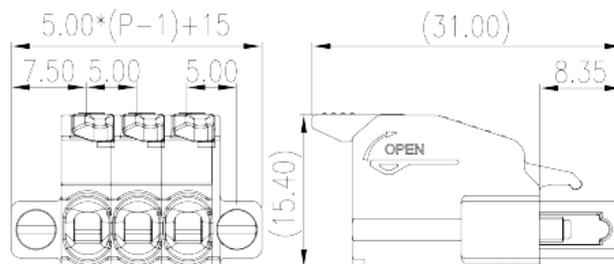

Pitch : 5.00 mm, 300V, 15A

	PCB Connector Plug, Push-in Design
	PCB Connector – Plug
(mm)	5.00
	Green (default)
	Push in Design
	With screw flange
(mm)	$5.00 \times (P-1) + 15$
(mm)	31
(mm)	15.4
( )	02P~24P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

Tin PLATED

**-IEC**

(V)	630
(A)	18
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	2.5
2 (mm <sup>2</sup> ) , ,	0.5
2 (mm <sup>2</sup> ) , ,	1.5
(N.m)	0.2
	10~12

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	15
UL/CUL                      AWG	26
UL/CUL                      AWG	12
UL/CUL                      AWG	26

UL/CUL	AWG	12
<b>&amp;</b>		
가	(YES or NO)	YES
		120
		-40

