


0257-14XX

PCB > PCB -

:2026-02-09

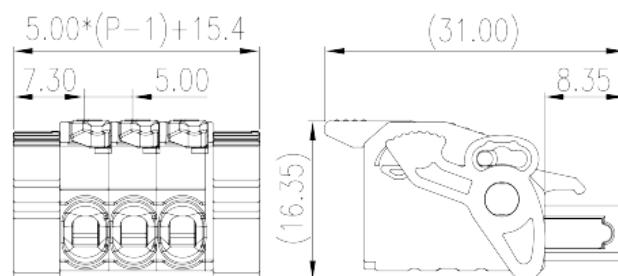

Pitch : 5.00 mm, 300V, 15A

	PCB Connector Plug, Push-in Design
	PCB Connector – Plug
(mm)	5.00
	Green (default)
	Push in Design
	With release tool
(mm)	5.00*(P-1)+15.4
(mm)	31
(mm)	15.4
()	02P~24P
	Single level

UL 94	PA I V0
	500M at DC 500V COPPER ALLOY

Tin PLATED

-IEC

(V)		630
(A)		18
(II/2)(V)		630
(III/2)(V)		320
(III/3)(V)		320
(II/2)(KV)		4
(III/2)(KV)		4
(III/3)(KV)		4
(mm ²)		0.2
(mm ²)		2.5
(mm ²)		0.2
(mm ²)		2.5
(mm ²) , ,		0.25
(mm ²) , ,		2.5
(mm ²) , ,		0.25
(mm ²) , ,		2.5
2 (mm ²) , ,		0.5
2 (mm ²) , ,		1.5
		10~12

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		15
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		15
UL/CUL	AWG	26
UL/CUL	AWG	12
UL/CUL	AWG	26
UL/CUL	AWG	12

&

가	(YES or NO)	YES
		120
		-40

