


0257-14XX

PCB > PCB -

:2026-03-29

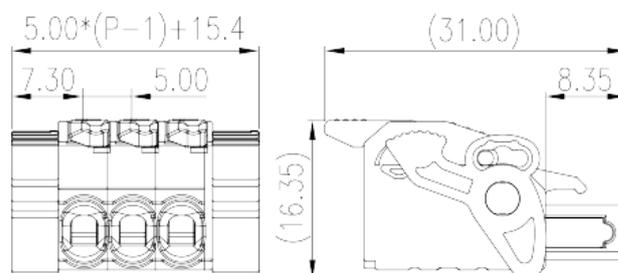

Pitch : 5.00 mm, 300V, 15A

	PCB Connector Plug, Push-in Design
	PCB Connector – Plug
(mm)	5.00
	Green (default)
	Push in Design
	With release tool
(mm)	$5.00*(P-1) + 15.4$
(mm)	31
(mm)	15.4
()	02P~24P
	Single level

	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY



Tin PLATED

-IEC

(V)	630
(A)	18
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm ²)	0.2
(mm ²)	2.5
(mm ²)	0.2
(mm ²)	2.5
(mm ²) , ,	0.25
(mm ²) , ,	2.5
(mm ²) , ,	0.25
(mm ²) , ,	2.5
² (mm ²) , ,	0.5
² (mm ²) , ,	1.5
	10~12

-UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	15
UL/CUL AWG	26
UL/CUL AWG	12
UL/CUL AWG	26
UL/CUL AWG	12

&

가 (YES or NO)	YES
	120
	-40

