


# 2EHDPN-XXP

PCB > PCB -

:2026-07-06

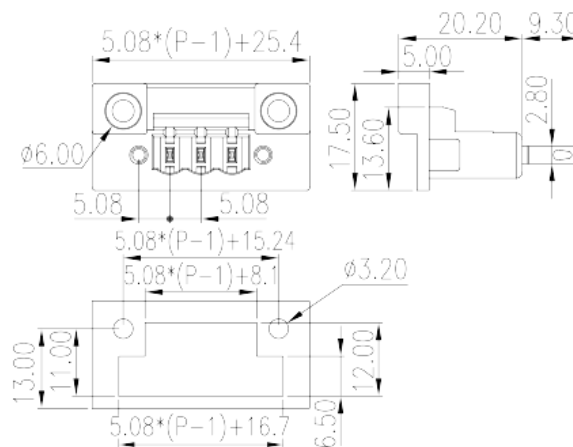

Pitch: 5.08mm, 300V, 15A

	Connector – Socket, Manual welding
	PCB Connector – Socket
(mm)	5.08
	Green (default)
	Manual welding&Slip-on connection
	With threaded flange
	Manual welding
(mm)	$5.08 \times (P-1) + 25.4$
(mm)	17.5
(mm)	29.5
( ) x ( ) (mm)	0.8x2.8
( )	02P~24P
	Single level
	PA
	I
UL 94	V0



	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

**-IEC**

(V)	630
(A)	18
(II/2)(V)	630
(III/2)(V)	320
(III/3)(V)	320
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	2.5

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	24
UL/CUL AWG	12
UL/CUL AWG	24
UL/CUL AWG	12

**&**

가 (YES or NO)	YES
	120
	-40

