
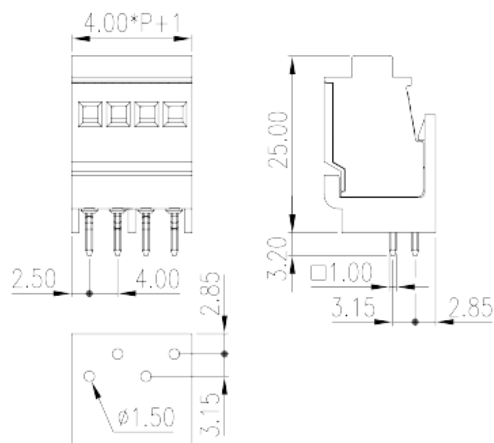


# 0162-A6XX

PCB > PCB -

:2026-07-05

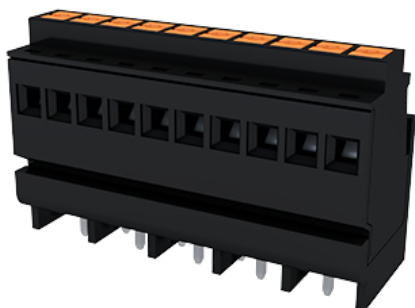

Pitch: 4.00mm, 300V, 10A

	PCB Connector, Push-in Design
	PCB Connector
(mm)	4.00
	Black (default)
	Push in Design
	With lock flange
	Wave Soldering
(mm)	4.00*(P-1)+5
(mm)	15.7
(mm)	25
( ) x ( ) (mm)	1x1
PCB (mm)	1.5
( )	02P~24P
	Single level
	PA
	I

UL 94	V0
	500M at DC 500V
	COPPER ALLOY
	Tin PLATED

### -IEC

(V)	400
(A)	10
(II/2)(V)	400
(III/2)(V)	320
(III/3)(V)	250
(II/2)(KV)	4
(III/2)(KV)	4
(III/3)(KV)	4
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> )	0.2
(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	1.5
(mm <sup>2</sup> ) , ,	0.25
(mm <sup>2</sup> ) , ,	1.5
Width)(mm) (Blade thickness x	0.5x3
	10~11

### -UL

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	10
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	24
UL/CUL AWG	12

UL/CUL	AWG	24
UL/CUL	AWG	12

&

가	(YES or NO)	YES
		120
		-40

## UL

(Group B)(AWG)	24~12
(Group B)(V)	300
(Group B)(A)	10
(Group D)(AWG)	24~12
(Group D)(V)	300
(Group D)(A)	10

## CUL

(Group B)(AWG)	24~12
(Group B)(V)	300
(Group B)(A)	10
(Group D)(AWG)	24~12
(Group D)(V)	300
(Group D)(A)	10

