


3ESDVNM-XXP

PCB > PCB -

:2026-05-14

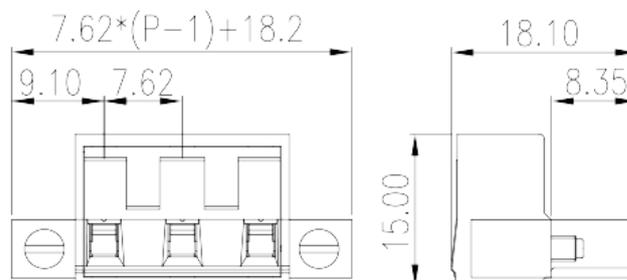

Pitch : 7.62mm, M2.5, 300V, 15A

	PCB Connector-Plug, Screw Connection
	PCB Connector – Plug
(mm)	7.62
	Green (default)
	Screw Connection
	With screw flange
(mm)	$7.62 * (P - 1) + 18.2$
(mm)	18.1
(mm)	15
()	02P~12P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

		Tin PLATED
-IEC		
(V)		800
(A)		18
(II/2)(V)		800
(III/2)(V)		630
(III/3)(V)		500
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm ²)		0.2
(mm ²)		4
(mm ²)		0.2
(mm ²)		2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
(mm ²)	,	0.25
(mm ²)	,	2.5
2	(mm ²)	0.2
2	(mm ²)	1.5
2	(mm ²)	0.2
2	(mm ²)	1.5
(mm ²) ²	,	0.25
(mm ²) ²	,	1
2	(mm ²)	0.5
2	(mm ²)	1.5
		M2.5
Width)(mm)	(Blade thickness x	0.6x3.5
	(N.m)	0.4


(N.m)	0.5
(N.m)	0.3
	7~8

-UL

(UL/CUL Group B)(V)		300
(UL/CUL Group B)(A)		15
(UL/CUL Group D)(V)		300
(UL/CUL Group D)(A)		10
UL/CUL	AWG	28
UL/CUL	AWG	12
UL/CUL	AWG	30
UL/CUL	AWG	12

&

가 (YES or NO)	YES
	120
	-40

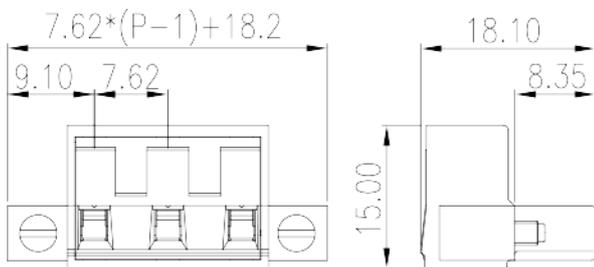



Delight Through Connections