


# 3ESDVNM-XXP

PCB > PCB -

:2026-07-04

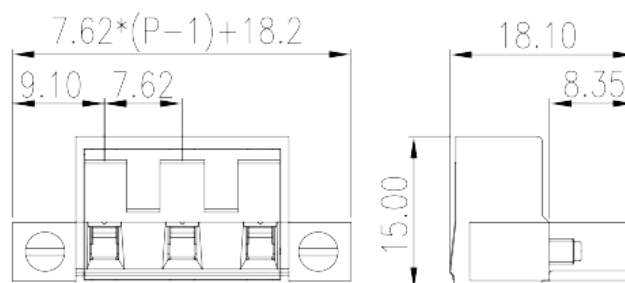

Pitch : 7.62mm, M2.5, 300V, 15A

	PCB Connector-Plug, Screw Connection
	PCB Connector – Plug
(mm)	7.62
	Green (default)
	Screw Connection
	With screw flange
(mm)	$7.62 \times (P-1) + 18.2$
(mm)	18.1
(mm)	15
( )	02P~12P
	Single level
	PA
	I
UL 94	V0
	500M at DC 500V
	COPPER ALLOY

		Tin PLATED
<b>-IEC</b>		
(V)		800
(A)		18
(II/2)(V)		800
(III/2)(V)		630
(III/3)(V)		500
(II/2)(KV)		6
(III/2)(KV)		6
(III/3)(KV)		6
(mm <sup>2</sup> )		0.2
(mm <sup>2</sup> )		4
(mm <sup>2</sup> )		0.2
(mm <sup>2</sup> )		2.5
(mm <sup>2</sup> )	,	0.25
(mm <sup>2</sup> )	,	2.5
(mm <sup>2</sup> )	,	0.25
(mm <sup>2</sup> )	,	2.5
2	(mm <sup>2</sup> )	0.2
2	(mm <sup>2</sup> )	1.5
2	(mm <sup>2</sup> )	0.2
2	(mm <sup>2</sup> )	1.5
(mm <sup>2</sup> ) <sup>2</sup>	,	0.25
(mm <sup>2</sup> ) <sup>2</sup>	,	1
2	(mm <sup>2</sup> )	0.5
2	(mm <sup>2</sup> )	1.5
		M2.5
Width)(mm)	(Blade thickness x	0.6x3.5
	(N.m)	0.4


(N.m)	0.5
(N.m)	0.3
	7~8

**-UL**

(UL/CUL Group B)(V)	300
(UL/CUL Group B)(A)	15
(UL/CUL Group D)(V)	300
(UL/CUL Group D)(A)	10
UL/CUL AWG	28
UL/CUL AWG	12
UL/CUL AWG	30
UL/CUL AWG	12

**&**

가 (YES or NO)	YES
	120
	-40

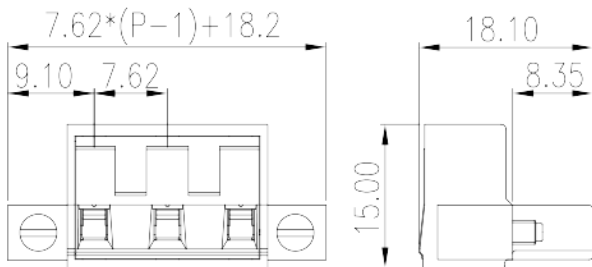



Delight Through Connections