
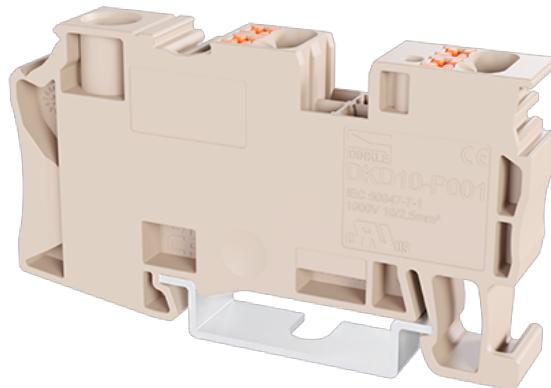


DKD10-P001

DIN

>

:2026-02-09

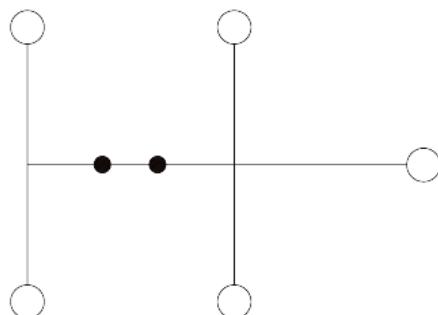

600V, 60A, Beige (default)

	Potential collective Terminal Block, Screw Connection /Push-in Design
	Potential collective Terminal Block
	Beige (default)
	Screw Connection /Push-in Design
	Rail Mounting
(mm)	65.4
(mm)	10.2
(mm)	35.8/ 37.3 (TS-35N) / 44.8 (TS-35/15N)
	Single level
	5

UL 94	PA I V0 500M at DC 500V
-------	----------------------------------

-IEC



(V)		1000
(A)		57/24
(III/3)(V)		1000
(III/3)(KV)		8
(mm ²)		0.5/0.14
(mm ²)		10/4
(mm ²)		0.5/0.14
(mm ²)		10/2.5
(mm ²) , , ,		0.5/0.25
(mm ²) , , ,		10/2.5
(mm ²) , , ,		0.5/0.25
(mm ²) , , ,		10/2.5
2 (mm ²) , , ,		0.5
2 (mm ²) , , ,		0.5
		M4
Width)(mm)	(Blade thickness x	0.6x3.5/ PH1
	(N.m)	1.2
	(N.m)	1.5
		12~14 9~10
		TS-35N、 TS-35/15N
		NO
		NO

-UL

(UL/CUL Group B)(V)		600
(UL/CUL Group B)(A)		60/20
(UL/CUL Group C)(V)		600
(UL/CUL Group C)(A)		60/20
UL/CUL	AWG	20/26
UL/CUL	AWG	6/12
UL/CUL	AWG	20/26

UL/CUL

AWG

6/12

&

	(YES or NO)	YES
가	(YES or NO)	YES
		120
		-40

